

# Modern

Catalogue 2017



- Resin Material -  
**DURALIGHTING®**




NEW

# Bollard Half

BOLLARD with post and flat lid in resin material Duralighting®; transparent or opal diffuser in polycarbonate UV stabilized.

Aluminium sheet fixed inside the diffuser to produce a light beam of 180°.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.

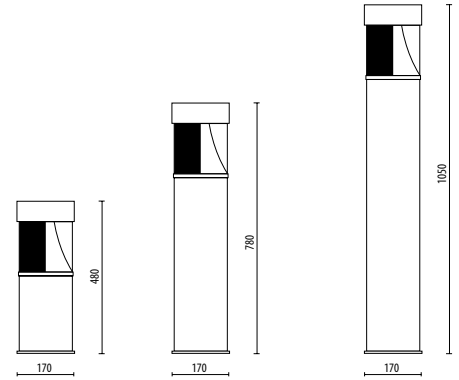


## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m³)	ENERGY CLASS	COLOR
DB.1125	D.BOLLARD/50/FT/SLV/LED-HALF	LED 18W	4000K-2800lm	0.02	A+	■
DB.1126	D.BOLLARD/50/FT/BLK/LED-HALF	LED 18W	4000K-2800lm	0.02	A+	■
DB.1124	D.BOLLARD/80/FT/SLV/LED-HALF	LED 18W	4000K-2800lm	0.03	A+	■
DB.1090	D.BOLLARD/80/FT/BLK/LED-HALF	LED 18W	4000K-2800lm	0.03	A+	■
DB.1123	D.BOLLARD/105/FT/SLV/LED-HALF	LED 18W	4000K-2800lm	0.04	A+	■
DB.1076	D.BOLLARD/105/FT/BLK/LED-HALF	LED 18W	4000K-2800lm	0.04	A+	■

Module **42 LED - Remote Driver Included** - Service life: **50.000 h.**

Available E27 - max 60W, METAL HALIDE 35W or SODIUM 70W  
Available on request with daylight and motion sensor

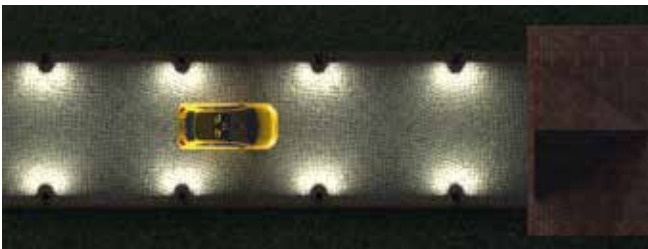

IP55 □ CE ▽ U.V. RESISTANT ♻️

BOLLARD


NEW

# Minilite ML 06



Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.  
Fixing kit included.

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.

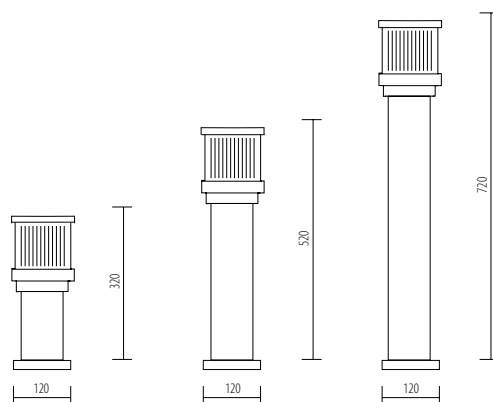

## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.1117	ML 06/310/SLV	E27 - max 40W	0,015	A > D	■
DB.1116	ML 06/510/SLV	E27 - max 40W	0,015	A > D	■
DB.1115	ML 06/710/SLV	E27 - max 40W	0,025	A > D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.1118	ML 06/310/SLV/LED	LED 4,5W	4000K- 450lm	0,015	A+	■
DB.1119	ML 06/510/SLV/LED	LED 4,5W	4000K- 450lm	0,015	A+	■
DB.1120	ML 06/710/SLV/LED	LED 4,5W	4000K- 450lm	0,025	A+	■


Module 10 LED - Direct connection to 230V (driver not necessary) - Service life: 50.000 h.  
available also in bronze color ■

NEW

# Minilite ML 06/MT

Spotlight with body in resin material Duralighting® complete with base for installation on the wall; diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, balcony, residential area.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.1121	ML 06/MT/SLV	E27 - max 40W	0,008	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.1122	ML 06/MT/SLV/LED	LED 4,5W	4000K- 450lm	0,008	A+	■

Module 10 LED - Direct connection to 230V (driver not necessary) - Service life: 50.000 h.

Available also in bronze color ■

IP44 □ CE ▽ U.V. RESISTANT ♻️

MINILITE



# Modern

Outdoor Lighting



# The Company

---

**DURALITE was born out of a thirty-year strong experience in designing and manufacturing of aluminium tools and the same long presence in aluminium casting industry.**

Why not apply this vast experience even to the lighting technology?

Our painstaking products research, design and full development within the company are our key to propose ever modern and actual fixtures, capable of meeting any requirements in the residential lighting for outdoor use.

Each and every piece is the fruit of constant market research and continuous improvement.

Our perfect knowledge of the characteristics of the various materials to be used is the propelling force behind our ability to produce complete series of products with different aesthetic and technologic configuration capable of compete at international level and perfectly adapting to the ever-varying market we operate in today.


## Quality and Innovation

---

Both 'quality' and 'innovation' play vital roles for business to remain competitive.

**DURALITE** discovers, makes innovation and progress always working in according to the most updated **international standard and regulation**.

All **DURALITE** products are **CE** marked to ensure a total quality control in full respect of customer's safeness and environment.

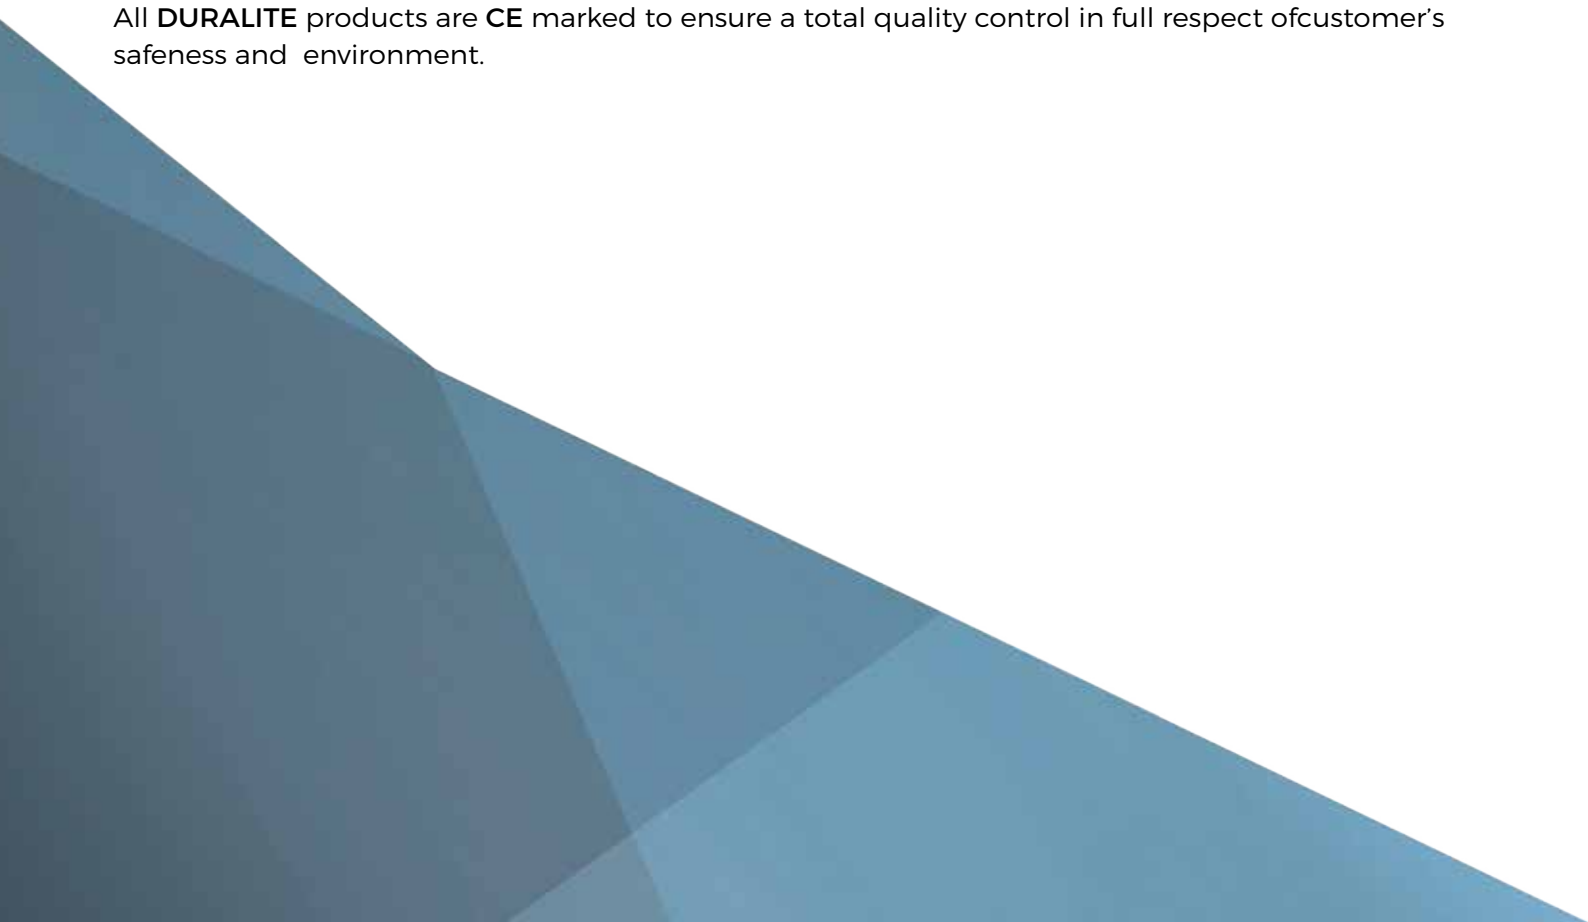

# Services

---



## CUSTOMER CARE

---

Our website and constantly operating telephone lines help us guarantee an efficient customer care service.



## TECHNICAL SUPPORT

---

Thanks to the experience gathered over the years, at **DURALITE** we are in a position to offer both pre and after sales technical support.



## JUST IN TIME

---

Is a system of supplying goods as close as possible to when they are actually needed.

JIT is one of the propelling forces behind **DURALITE**.

In-house production guarantees quick delivery time thus facilitating the customer in terms of sales and warehouse management.



## MADE IN ITALY

---

**DURALITE** products are painstakingly designed to reflect the class and finesse of the Italian design which has always been a symbol of style and quality.





# Resin Material Duralighting®

---

Outdoor lighting requires painstaking search of materials and technologies most suitable to guarantee high resistance.

Thus, not only did we - at **DURALITE** - conceive and patent a material which subsequently led to solid and long lasting products, but we also maintained a classy design and finishing: **DURALIGHTING®**.


**DURALIGHTING®** is a resin resistant to corrosion and caustic substances.

It is a **UV-stabilized** material resistant to any atmospheric agent.

Thus, thanks to this resistance, it is suitable for any climatic condition and above all in coastal areas with particularly high salt values.

Products made using **DURALIGHTING®** have a specific weight and smooth metal-like classy finishing.

In addition, **DURALIGHTING®** is not painted: the colour is in the raw material and thus no problems related to discoloration and fading, hence requiring least maintenance possible.

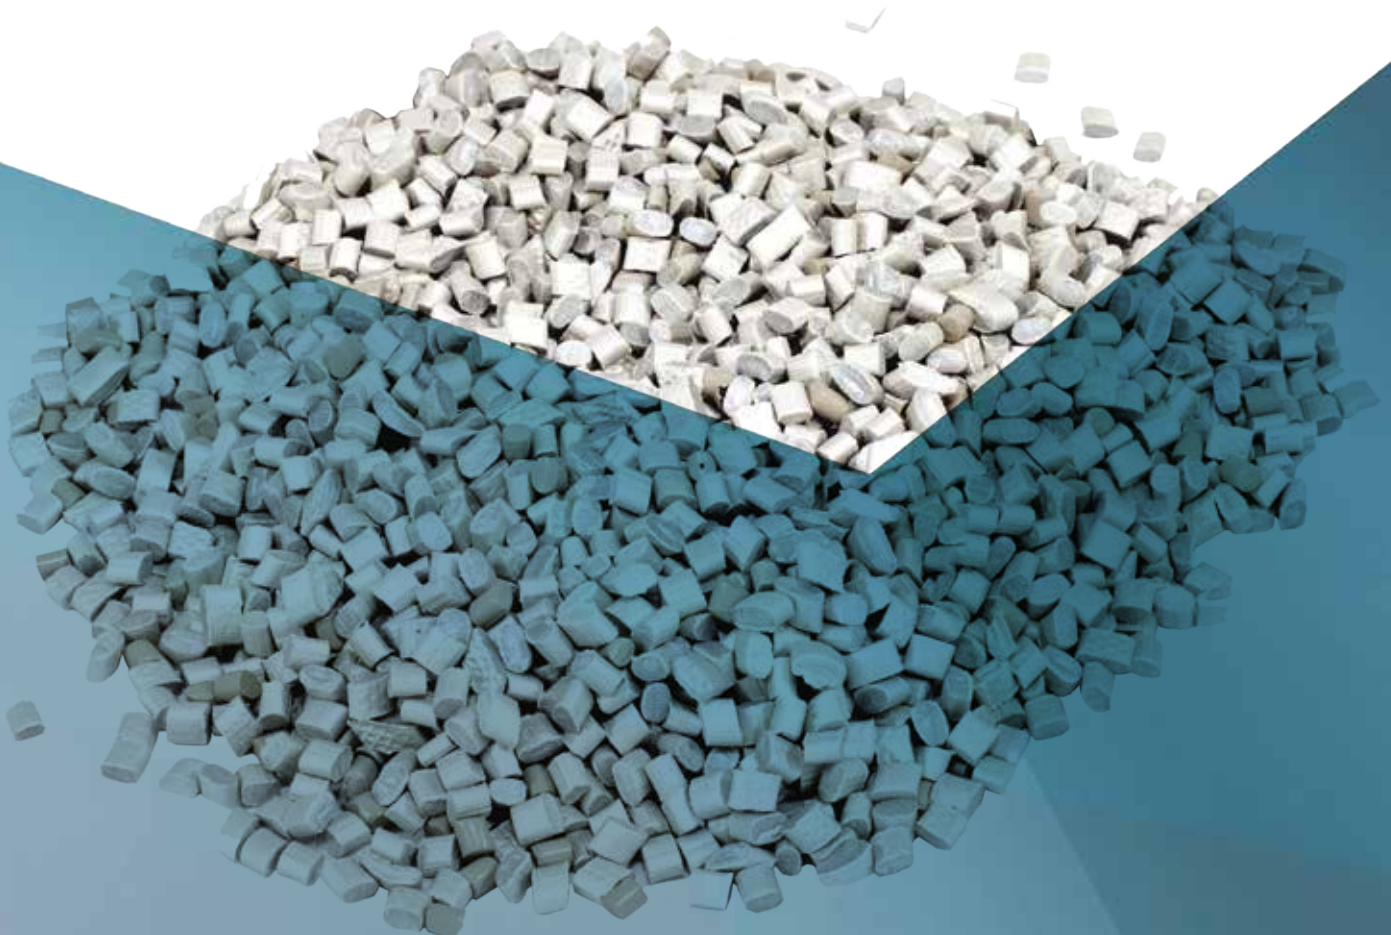


# Why choose DURALIGHTING® products?

---



## **ANTI CORROSION**

Resistant to any atmospheric agent



## **UV STABILIZED**

Protected from the long-term  
UV degradation effects



## **NO MAINTENANCE**

Painting not necessary  
- the color is in the paste of raw material-

**SAFETY  
FIRST!**

## **DOUBLE INSULATION**

Not require a safety connection  
to electrical earth



## **HIGH SPECIFIC WEIGHT**

Heavy and strong material



## **ELEGANT STYLE AND SMOOTH FINISH**

High quality and great appearance



# LED Technology


---

At **DURALITE SRL** we always have a keen eye for technological development, innovation and quality without forgetting environmental protection and energy saving.

Guided by these principles, we - at **DURALITE** - offer the entire array of **DURALIGHTING®** resin products based on the **LED** technology.

We combine two extremely efficient elements, **DURALIGHTING®** and **LED**, conceived to guarantee long duration, and minimum environmental impact.

As a team, at **DURALITE SRL** we collaborate with top-notch experts in the lighting industry with the aim of conceiving and designing the topmost lighting solution so as to guarantee reliable quality products always at the forefront of the rapidly developing world of **LED** technology.

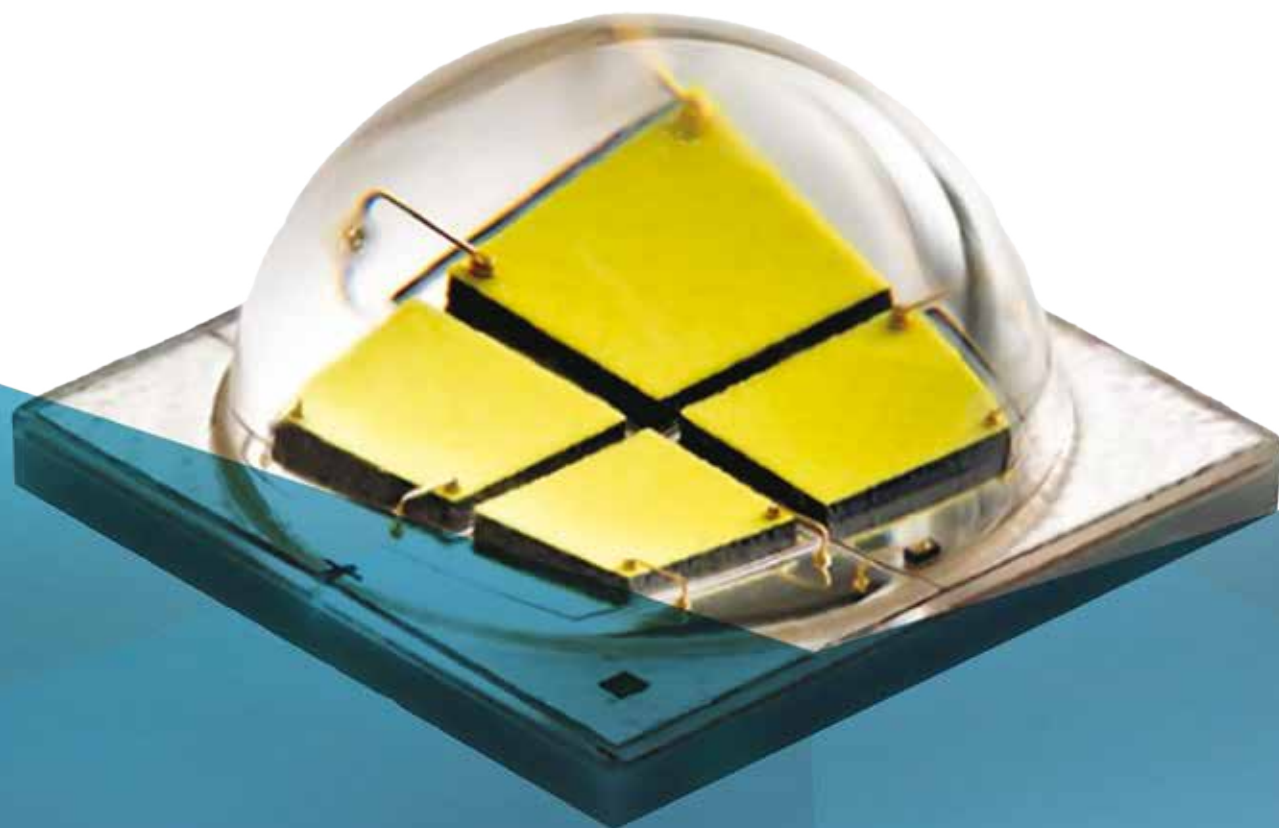

# LED and Environment

---

Taking care of the environment is a responsibility that everyone should feel accountable for. We - at **DURALITE** - want to promote this concept by applying everyday a **GO GREEN - SAVE GREEN** policy.

As a matter of fact, LEDs provide many environmental and economic advantages:






































\* **life span and durability:** LEDs are solid state lighting devices that utilize semiconductor material instead of a filament or neon gas. Since LEDs don't use fragile components such as glass and filaments, LEDs are able to withstand shock, vibration and extreme temperature. LED lights last up to 6 times than other types of lights, reducing the requirement for frequent replacements which help reduce landfill and means also lower carbon emission.

\* **high energy efficient and reduced energy used:** LEDs are extremely energy efficient and consume up to 90% less power than any bulbs. Traditional filament lamps (bulbs) need to generate a lot of heat, to warm the filament and create light. Creating this heat wastes a significant amount of energy. In LED lamps, a far higher percentage of the power they use goes directly to generating light. In simple terms LEDs produce more light (measured in lumens) per watt than regular incandescent lamps, therefore they use less energy.

\* **ecologically friendly:** LED lights contain no toxic materials and no emit UV-rays or infrared radiation. They are 100% recyclable.



# Index

<b>Futura</b>							
	Pag.12 <b>Futura Pop</b>	Pag.13 <b>Futura Rap</b>	Pag.15 <b>Futura Rock 60</b>	Pag.16 <b>Futura Rock 100</b>	Pag.17 <b>Futura Swing 100</b>	Pag.18 <b>Futura Funk 60</b>	
							
	Pag.19 <b>Futura Funk 100</b>	Pag.21 <b>Futura Soul 60</b>	Pag.22 <b>Futura Soul 100</b>	Pag.23 <b>Futura Blues 100</b>	Pag.24 <b>Futura Jazz 60</b>	Pag.25 <b>Futura Jazz 100</b>	
	<b>Bollard</b>						
		Pag.28 <b>Bollard 50 FT</b>	Pag.29 <b>Bollard 80 FT</b>	Pag.31 <b>Bollard 105 FT</b>	Pag.32 <b>Bollard 50 RD</b>	Pag.33 <b>Bollard 80 RD</b>	Pag.35 <b>Bollard 105 RD</b>
							
Pag.36 <b>Bollard 50 CN</b>		Pag.37 <b>Bollard 80 CN</b>	Pag.39 <b>Bollard 105 CN</b>				
<b>Fresnel</b>							
		Pag. 42 <b>Fresnel 4008</b>	Pag. 43 <b>Fresnel 4009</b>	Pag. 45 <b>Fresnel 4010</b>	Pag. 46 <b>Fresnel 4011</b>	Pag. 47 <b>Fresnel 4012</b>	
		<b>Minilite</b>					
	Pag. 50 <b>Minilite ML 01</b>		Pag. 51 <b>Minilite ML 07</b>	Pag. 52 <b>Minilite ML 03/310</b>	Pag. 53 <b>Minilite ML 03/510</b>	Pag. 54 <b>Minilite ML 03/710</b>	Pag. 55 <b>Minilite ML 03/MT</b>
							
Pag. 57 <b>Minilite ML 04/310</b>	Pag. 58 <b>Minilite ML 04/510</b>		Pag. 59 <b>Minilite ML 04/710</b>	Pag. 61 <b>Minilite ML 04/MT</b>	Pag. 62 <b>Minilite ML 05/310</b>	Pag. 63 <b>Minilite ML 05/510</b>	Pag. 64 <b>Minilite ML 05/710</b>

# Index



Pag.65  
**Minilite ML 05/MT**



Pag.66  
**Minilite 6002/310**



Pag.67  
**Minilite 6002/510**



Pag.68  
**Minilite 6002/710**



Pag.69  
**Minilite 6002/B**



Pag.70  
**Minilite 6002/ML**



Pag.71  
**Minilite 6002/P**

## Par



Pag.74  
**Par 38 1/P**



Pag.75  
**Par 38 1/M**



Pag.77  
**Par 38 2/P**



Pag.79  
**Par 38 2/M**



Pag.80  
**Par 20 1/P**



Pag.81  
**Par 20 1/M**



Pag.82  
**Par 20 2/P**



Pag.83  
**Par 20 2/M**



Pag.84  
**Par 20 R 1/P**



Pag.85  
**Par 20 R 1/P**



Pag.87  
**Par 20 R/310**



Pag.88  
**Par 20 R/510**



Pag.89  
**Par 20 R/710**



Pag.91  
**Par PL/M**



Pag.92  
**Par PL/P**



Pag.93  
**Par Presa**

## Temde



Pag.96  
**Temde**



Pag.97  
**Temde**

## Clio



Pag.100  
**Clio 280**



Pag.101  
**Clio 390**

## Sidelight



Pag.104  
**Sidelight 1**



Pag.105  
**Sidelight 2**

## The Classic with LED



Pag.108  
**The Classic with LED D.700**



Pag.109  
**The Classic with LED D.377**



Pag.110  
**The Classic with LED D.577/P**



Pag.111  
**The Classic with LED D.50 MILANO**



# Futura

Is the latest finding of **DURALITE** ranges. It has been studied to meet the market's demands for modern residential lighting. Its configuration on the wall or on the post with 1 or 2 lights in different heights is the best way to light up the private houses, villas, hotels, parks, gardens and residential areas.



**FUTURA POP**



**FUTURA RAP**



**FUTURA ROCK**



**FUTURA SWING**



**FUTURA SOUL**



**FUTURA BLUES**

## MATERIAL

**BODY** and **POST** in resin material **DURALIGHTING®**: a patented material studied to resist against UV-rays, corrosion and all weather agents. It can be used in any climatic areas especially in marine environments and tropical climates. The **DURALIGHTING®** is a strong and resistant material with a polished and smooth finish. **DIFFUSER** in opal polycarbonate UV stabilized.

## TECHNICAL DETAILS

PROTECTION DEGREE: **IP65**  
ISOLATION CLASS: **II**  
COLOR: **black, silver**  
LAMP: **E27 / LED**  
Stainless steel screws  
Aluminium reflector  
Silicon seal gasket  
Fixing kit included

## APPLICATIONS

- GARDEN
- BALCONY
- PORCH
- COURT
- WALKWAY
- COMMERCIAL AREA
- PARK




# Futura Pop



Light fitting with body in resin material **Duralighting®**, complete with base for installation on the wall; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, balcony, walkway, residential area, commercial area.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0793	FUTURA/POP/BLK	E27 - max 42W	0,01	A>D	■
DB.0794	FUTURA/POP/SLV	E27 - max 42W	0,01	A>D	■

## LED


CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0796	FUTURA/POP/BLK/LED/N	LED 15W	4000K-1600lm	0,01	A+	■
DB.0795	FUTURA/POP/SLV/LED/N	LED 15W	4000K-1600lm	0,01	A+	■
DB.1006	FUTURA/POP/BLK/LED/W	LED 15W	2700K-1400lm	0,01	A+	■
DB.1007	FUTURA/POP/SLV/LED/W	LED 15W	2700K-1400lm	0,01	A+	■

Module **30 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h**.

# Futura Rap

Light fitting with body in resin material Duralighting®, complete with base for installation on the wall; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, balcony, walkway, residential area, commercial area.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0801	FUTURA/RAP/BLK	E27 - max 42W	0,01	A>D	■
DB.0803	FUTURA/RAP/SLV	E27 - max 42W	0,01	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0800	FUTURA/RAP/BLK/LED/N	LED 15W	4000K-1600lm	0,01	A+	■
DB.0790	FUTURA/RAP/SLV/LED/N	LED 15W	4000K-1600lm	0,01	A+	■
DB.1008	FUTURA/RAP/BLK/LED/W	LED 15W	2700K-1400lm	0,01	A+	■
DB.1009	FUTURA/RAP/SLV/LED/W	LED 15W	2700K-1400lm	0,01	A+	■

Module **30 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h**.


IP65 CE U.V. RESISTANT



# Futura Rock/60

Light fitting with body and post in resin material Duralighting® complete with base for installation on the ground; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0826	FUTURA/ROCK/60/BLK	E27 - max 42W	0,02	A>D	■
DB.0827	FUTURA/ROCK/60/SLV	E27 - max 42W	0,02	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0828	FUTURA/ROCK/60/BLK/LED/N	LED 15W	4000K-1600lm	0,02	A+	■
DB.0829	FUTURA/ROCK/60/SLV/LED/N	LED 15W	4000K-1600lm	0,02	A+	■
DB.1010	FUTURA/ROCK/60/BLK/LED/W	LED 15W	2700K-1400lm	0,02	A+	■
DB.1011	FUTURA/ROCK/60/SLV/LED/W	LED 15W	2700K-1400lm	0,02	A+	■

Module **30 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h**.


IP65 CE U.V. RESISTANT



# Futura Rock/100

Light fitting with body and post in resin material Duralighting® complete with base for installation on the ground; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0830	FUTURA/ROCK/100/BLK	E27 - max 42W	0,03	A>D	■
DB.0831	FUTURA/ROCK/100/SLV	E27 - max 42W	0,03	A>D	■

## LED


CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0832	FUTURA/ROCK/100/BLK/LED/N	LED 15W	4000K-1600lm	0,03	A+	■
DB.0833	FUTURA/ROCK/100/SLV/LED/N	LED 15W	4000K-1600lm	0,03	A+	■
DB.1012	FUTURA/ROCK/100/BLK/LED/W	LED 15W	2700K-1400lm	0,03	A+	■
DB.1013	FUTURA/ROCK/100/SLV/LED/W	LED 15W	2700K-1400lm	0,03	A+	■

Module **30 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h**.

# Futura Swing/100

Light fitting with body and post in resin material Duralighting® complete with base for installation on the ground; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0839	FUTURA/SWING/100/BLK	E27 - max 42W	0,05	A>D	■
DB.0842	FUTURA/SWING/100/SLV	E27 - max 42W	0,05	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0843	FUTURA/SWING/100/BLK/LED/N	LED 15W	4000K-1600lm	0,05	A+	■
DB.0844	FUTURA/SWING/100/SLV/LED/N	LED 15W	4000K-1600lm	0,05	A+	■
DB.1018	FUTURA/SWING/100/BLK/LED/W	LED 15W	2700K-1400lm	0,05	A+	■
DB.1019	FUTURA/SWING/100/SLV/LED/W	LED 15W	2700K-1400lm	0,05	A+	■


Module **30 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h.**

IP65 □ CE ▽ U.V. RESISTANT ♻️

# Futura Funk/60

Light fitting with body and post in resin material Duralighting® complete with base for installation on the ground; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0834	FUTURA/FUNK/60/BLK	E27 - max 42W	0,04	A>D	■
DB.0835	FUTURA/FUNK/60/SLV	E27 - max 42W	0,04	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0837	FUTURA/FUNK/60/BLK/LED/N	LED 15W	4000K-1600lm	0,04	A+	■
DB.0819	FUTURA/FUNK/60/SLV/LED/N	LED 15W	4000K-1600lm	0,04	A+	■
DB.1014	FUTURA/FUNK/60/BLK/LED/W	LED 15W	2700K-1400lm	0,04	A+	■
DB.1015	FUTURA/FUNK/60/SLV/LED/W	LED 15W	2700K-1400lm	0,04	A+	■


Module **30 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h**.



# Futura Funk/100

Light fitting with body and post in resin material Duralighting® complete with base for installation on the ground; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0838	FUTURA/FUNK/100/BLK	E27 - max 42W	0,05	A>D	■
DB.0836	FUTURA/FUNK/100/SLV	E27 - max 42W	0,05	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0840	FUTURA/FUNK/100/BLK/LED/N	LED 15W	4000K-1600lm	0,05	A+	■
DB.0841	FUTURA/FUNK/100/SLV/LED/N	LED 15W	4000K-1600lm	0,05	A+	■
DB.1016	FUTURA/FUNK/100/BLK/LED/W	LED 15W	2700K-1400lm	0,05	A+	■
DB.1017	FUTURA/FUNK/100/SLV/LED/W	LED 15W	2700K-1400lm	0,05	A+	■

Module **30 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h**.

IP65 □ CE U.V. RESISTANT ♻️







# Futura Soul/60

Light fitting with body and post in resin material Duralighting®; diffuser in opal polycarbonate UV stabilized.

Without base: to fix in the ground with concrete plinth of cm 40x40x40.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0845	FUTURA/SOUL/60/BLK	E27 - max 42W	0,02	A>D	■
DB.0846	FUTURA/SOUL/60/SLV	E27 - max 42W	0,02	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0847	FUTURA/SOUL/60/BLK/LED/N	LED 15W	4000K-1600lm	0,02	A+	■
DB.0848	FUTURA/SOUL/60/SLV/LED/N	LED 15W	4000K-1600lm	0,02	A+	■
DB.1020	FUTURA/SOUL/60/BLK/LED/W	LED 15W	2700K-1400lm	0,02	A+	■
DB.1021	FUTURA/SOUL/60/SLV/LED/W	LED 15W	2700K-1400lm	0,02	A+	■

Module **30 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h**.

IP65 □ CE ▽ U.V. RESISTANT ♻️





# Futura Soul/100

Light fitting with body and post in resin material Duralighting®; diffuser in opal polycarbonate UV stabilized.

Without base: to fix in the ground with concrete plinth of cm 40x40x40.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0849	FUTURA/SOUL/100/BLK	E27 - max 42W	0,03	A>D	■
DB.0850	FUTURA/SOUL/100/SLV	E27 - max 42W	0,03	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0851	FUTURA/SOUL/100/BLK/LED/N	LED 15W	4000K-1600lm	0,03	A+	■
DB.0852	FUTURA/SOUL/100/SLV/LED/N	LED 15W	4000K-1600lm	0,03	A+	■
DB.1022	FUTURA/SOUL/100/BLK/LED/W	LED 15W	2700K-1400lm	0,03	A+	■
DB.1023	FUTURA/SOUL/100/SLV/LED/W	LED 15W	2700K-1400lm	0,03	A+	■

Module **30 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h**.





# Futura Blues/100

Light fitting with body and post in resin material Duralighting®; diffuser in opal polycarbonate UV stabilized.

Without base: to fix in the ground with concrete plinth of cm 40x40x40.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0861	FUTURA/BLUES/100/BLK	E27 - max 42W	0,05	A>D	■
DB.0862	FUTURA/BLUES/100/SLV	E27 - max 42W	0,05	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0863	FUTURA/BLUES/100/BLK/LED/N	LED 15W	4000K-1600lm	0,05	A+	■
DB.0864	FUTURA/BLUES/100/SLV/LED/N	LED 15W	4000K-1600lm	0,05	A+	■
DB.1028	FUTURA/BLUES/100/BLK/LED/W	LED 15W	2700K-1400lm	0,05	A+	■
DB.1029	FUTURA/BLUES/100/SLV/LED/W	LED 15W	2700K-1400lm	0,05	A+	■

Module **30 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h**.



IP65 CE U.V. RESISTANT

# Futura Jazz/60

Light fitting with body and post in resin material Duralighting®; diffuser in opal polycarbonate UV stabilized.

Without base: to fix in the ground with concrete plinth of cm 40x40x40.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0853	FUTURA/JAZZ/60/BLK	E27 - max 42W	0,04	A>D	■
DB.0854	FUTURA/JAZZ/60/SLV	E27 - max 42W	0,04	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0855	FUTURA/JAZZ/60/BLK/LED/N	LED 15W	4000K-1600lm	0,04	A+	■
DB.0856	FUTURA/JAZZ/60/SLV/LED/N	LED 15W	4000K-1600lm	0,04	A+	■
DB.1024	FUTURA/JAZZ/60/BLK/LED/W	LED 15W	2700K-1400lm	0,04	A+	■
DB.1025	FUTURA/JAZZ/60/SLV/LED/W	LED 15W	2700K-1400lm	0,04	A+	■

Module **30 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h**.





# Futura Jazz/100

Light fitting with body and post in resin material Duralighting®; diffuser in opal polycarbonate UV stabilized.

Without base: to fix in the ground with concrete plinth of cm 40x40x40.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0857	FUTURA/JAZZ/100/BLK	E27 - max 42W	0,05	A>D	■
DB.0858	FUTURA/JAZZ/100/SLV	E27 - max 42W	0,05	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0859	FUTURA/JAZZ/100/BLK/LED/N	LED 15W	4000K-1600lm	0,05	A+	■
DB.0860	FUTURA/JAZZ/100/SLV/LED/N	LED 15W	4000K-1600lm	0,05	A+	■
DB.1026	FUTURA/JAZZ/100/BLK/LED/W	LED 15W	2700K-1400lm	0,05	A+	■
DB.1027	FUTURA/JAZZ/100/SLV/LED/W	LED 15W	2700K-1400lm	0,05	A+	■

Module **30 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h.**

IP65 CE U.V. RESISTANT



# Bollard

Is the best-selling product of DURALITE. Thanks to its essential and elegant style, this traditional light fitting distinguishes from the BOLLARD currently on the market

Furthermore, the high quality of the resin material DURALIGHTING guarantees a 20-year lifetime of the product.

By virtue of these features, it is best suitable for outdoor environment for public use such as parks, squares and commercial areas , as well as for private houses, gardens and walkways.

It is available with flat, round or cone lid in different heights and with transparent or opal diffuser.



D.BOLLARD FLAT



D.BOLLARD FLAT LED



D.BOLLARD ROUND



D.BOLLARD CONE

## MATERIAL

**POST** and **LID** in resin material **DURALIGHTING®**: a patented material studied to resist against UV-rays, corrosion and all weather agents.

It can be used in any climatic areas especially in marine environments and tropical climates.

The **DURALIGHTING®** is a strong and resistant material with a polished and smooth finish.

**DIFFUSER** in transparent or opal polycarbonate UV stabilized.

## TECHNICAL DETAILS

PROTECTION DEGREE: **IP55**

ISOLATION CLASS: **II**

COLOR: **black / silver**

LAMP: **E27 / LED**

Aluminium louvre reflector in E27 version

White cone in LED version

Stainless steel screw

Tamper resistant screw with key included

Fixing kit TYPE F available on request

## APPLICATIONS

- GARDEN
- COURT
- WALKWAY
- COMMERCIAL AREA
- PUBLIC PARKING
- SQUARE
- PARK




# Bollard 50 Flat

BOLLARD with post and flat lid in resin material Duralighting®; diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.



Opal Diffuser (OP)



## E27


CODE	DESCRIPTION	LAMP	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0580	D.BOLLARD/50/FT/BLK	E27 - max 60W	0.02	A>D	Black
DB.0720	D.BOLLARD/50/FT/SLV	E27 - max 60W	0.02	A>D	Grey
DB.0728	D.BOLLARD/50/FT/BLK/OP	E27 - max 60W	0.02	A>D	Black
DB.0931	D.BOLLARD/50/FT/SLV/OP	E27 - max 60W	0.02	A>D	Grey

Available on request METAL HALIDE 35W or SODIUM 70W

Available on request with daylight and motion sensor



Opal Diffuser (OP)



## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0686	D.BOLLARD/50/FT/BLK/LED	LED 18W	4000K-2800lm	0.02	A+	Black
DB.0714	D.BOLLARD/50/FT/SLV/LED	LED 18W	4000K-2800lm	0.02	A+	Grey
DB.0936	D.BOLLARD/50/FT/BLK/OP/LED	LED 18W	4000K-2800lm	0.02	A+	Black
DB.0935	D.BOLLARD/50/FT/SLV/OP/LED	LED 18W	4000K-2800lm	0.02	A+	Grey

Module 42 LED - Remote Driver Included - Service life: 50.000 h.

Available on request with daylight and motion sensor



IP55




# Bollard 80 Flat

BOLLARD with post and flat lid in resin material Duralighting®; diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.



Opal Diffuser (OP)



## E27


CODE	DESCRIPTION	LAMP	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0581	D.BOLLARD/80/FT/BLK	E27 - max 60W	0,03	A>D	Black
DB.0715	D.BOLLARD/80/FT/SLV	E27 - max 60W	0,03	A>D	Grey
DB.0729	D.BOLLARD/80/FT/BLK/OP	E27 - max 60W	0,03	A>D	Black
DB.0937	D.BOLLARD/80/FT/SLV/OP	E27 - max 60W	0,03	A>D	Grey

Available on request METAL HALIDE 35W or SODIUM 70W

Available on request with daylight and motion sensor



Opal Diffuser (OP)



## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0687	D.BOLLARD/80/FT/BLK/LED	LED 18W	4000K-2800lm	0,03	A+	Black
DB.0710	D.BOLLARD/80/FT/SLV/LED	LED 18W	4000K-2800lm	0,03	A+	Grey
DB.0941	D.BOLLARD/80/FT/BLK/OP/LED	LED 18W	4000K-2800lm	0,03	A+	Black
DB.0940	D.BOLLARD/80/FT/SLV/OP/LED	LED 18W	4000K-2800lm	0,03	A+	Grey

Module 42 LED - Remote Driver Included - Service life: 50.000 h.

Available on request with daylight and motion sensor



IP55



U.V.

RESISTANT






# Bollard 105 Flat

BOLLARD with post and flat lid in resin material Duralighting® diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.



Opal Diffuser (OP)



## E27


CODE	DESCRIPTION	LAMP	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0576	D.BOLLARD/105/FT/BLK	E27 - max 60W	0,04	A>D	Black
DB.0724	D.BOLLARD/105/FT/SLV	E27 - max 60W	0,04	A>D	Grey
DB.0730	D.BOLLARD/105/FT/BLK/OP	E27 - max 60W	0,04	A>D	Black
DB.0942	D.BOLLARD/105/FT/SLV/OP	E27 - max 60W	0,04	A>D	Grey

Available on request METAL HALIDE 35W or SODIUM 70W

Available on request with daylight and motion sensor



Opal Diffuser (OP)



## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0688	D.BOLLARD/105/FT/BLK/LED	LED 18W	4000K-2800lm	0,04	A+	Black
DB.0716	D.BOLLARD/105/FT/SLV/LED	LED 18W	4000K-2800lm	0,04	A+	Grey
DB.0944	D.BOLLARD/105/FT/BLK/OP/LED	LED 18W	4000K-2800lm	0,04	A+	Black
DB.0945	D.BOLLARD/105/FT/SLV/OP/LED	LED 18W	4000K-2800lm	0,04	A+	Grey

Module 42 LED - Remote Driver Included - Service life: 50.000 h.

Available on request with daylight and motion sensor



IP55



U.V.


RESISTANT



# Bollard 50 Round

BOLLARD with post and round lid in resin material  
Duralighting®; diffuser in transparent or opal (OP)  
polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential  
area, commercial area, public parking, square, park.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0470	D.BOLLARD/50/RD/BLK	E27 - max 60W	0,02	A>D	■
DB.0719	D.BOLLARD/50/RD/SLV	E27 - max 60W	0,02	A>D	■
DB.0949	D.BOLLARD/50/RD/BLK/OP	E27 - max 60W	0,02	A>D	■
DB.0950	D.BOLLARD/50/RD/SLV/OP	E27 - max 60W	0,02	A>D	■

Available on request **METAL HALIDE 35W** or **SODIUM 70W**


Available on request with daylight and motion sensor



# Bollard 80 Round

BOLLARD with post and round lid in resin material Duralighting®; diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0471	D.BOLLARD/80/RD/BLK	E27 - max 60W	0,03	A>D	■
DB.0718	D.BOLLARD/80/RD/SLV	E27 - max 60W	0,03	A>D	■
DB.0953	D.BOLLARD/80/RD/BLK/OP	E27 - max 60W	0,03	A>D	■
DB.0954	D.BOLLARD/80/RD/SLV/OP	E27 - max 60W	0,03	A>D	■

Available on request **METAL HALIDE 35W** or **SODIUM 70W**

Available on request with daylight and motion sensor



IP55



U.V.  
RESISTANT








# Bollard 105 Round

BOLLARD with post and round lid in resin material Duralighting®; diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0472	D.BOLLARD/105/RD/BLK	E27 - max 60W	0,04	A>D	■
DB.0723	D.BOLLARD/105/RD/SLV	E27 - max 60W	0,04	A>D	■
DB.0973	D.BOLLARD/105/RD/BLK/OP	E27 - max 60W	0,04	A>D	■
DB.0974	D.BOLLARD/105/RD/SLV/OP	E27 - max 60W	0,04	A>D	■

Available on request **METAL HALIDE 35W** or **SODIUM 70W**

Available on request with daylight and motion sensor



IP55



U.V.  
RESISTANT






# Bollard 50 Cone

BOLLARD with post and conical lid in resin material Duralighting®; diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0577	D.BOLLARD/50/CN/BLK	E27 - max 60W	0,02	A > D	Black
DB.0722	D.BOLLARD/50/CN/SLV	E27 - max 60W	0,02	A > D	Grey
DB.0977	D.BOLLARD/50/CN/BLK/OP	E27 - max 60W	0,02	A > D	Black
DB.0978	D.BOLLARD/50/CN/SLV/OP	E27 - max 60W	0,02	A > D	Grey

Available on request **METAL HALIDE 35W** or **SODIUM 70W**

Available on request with daylight and motion sensor




# Bollard 80 Cone



BOLLARD with post and conical lid in resin material Duralighting®; diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0578	D.BOLLARD/80/CN/BLK	E27 - max 60W	0,03	A>D	■
DB.0721	D.BOLLARD/80/CN/SLV	E27 - max 60W	0,03	A>D	■
DB.0985	D.BOLLARD/80/CN/BLK/OP	E27 - max 60W	0,03	A>D	■
DB.0986	D.BOLLARD/80/CN/SLV/OP	E27 - max 60W	0,03	A>D	■

Available on request **METAL HALIDE 35W** or **SODIUM 70W**

Available on request with daylight and motion sensor



IP55








# Bollard 105 Cone

BOLLARD with post and conical lid in resin material Duralighting®; diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0579	D.BOLLARD/105/CN/BLK	E27 - max 60W	0,04	A>D	Black
DB.0725	D.BOLLARD/105/CN/SLV	E27 - max 60W	0,04	A>D	Grey
DB.0990	D.BOLLARD/105/CN/BLK/OP	E27 - max 60W	0,04	A>D	Black
DB.0991	D.BOLLARD/105/CN/SLV/OP	E27 - max 60W	0,04	A>D	Grey

Available on request **METAL HALIDE 35W** or **SODIUM 70W**

Available on request with daylight and motion sensor



IP55





# Fresnel

With its linear design in the wall mounted version or in the post mounted version, the FRESNEL satisfy the different tastes of customers. In addition to the classical model with transparent diffuser, now the FRESNEL is available with opal diffuser that transforms an evergreen products in something of really modern.



FRESNEL 4012



FRESNEL 4008



FRESNEL 4009



FRESNEL 4010



FRESNEL 4011

## MATERIAL

**POST** in extruded aluminium with base and and **LID** in resin material **DURALIGHTING®**: a patented material studied to resist against UV-rays, corrosion and all weather agents.

It can be used in any climatic areas especially in marine environments and tropical climates.

The **DURALIGHTING®** is a strong and resistant material with a polished and smooth finish.

**DIFFUSER** in transparent or opal polycarbonate UV stabilized.

## TECHNICAL DETAILS

PROTECTION DEGREE: **IP44**

ISOLATION CLASS: **I**

COLOR: **black / silver**

LAMP: **E27 / LED**

Stainless steel screws

Fixing kit TYPE F available on request

## APPLICATIONS

- GARDEN
- PORCH
- COURT
- WALKWAY
- COMMERCIAL AREA
- PUBLIC PARKING
- PARK

# Fresnel 4008

Light fitting with base and lid in resin material Duralighting®; post in extruded aluminium; diffuser in transparent or opal (OP) polycarbonate UV stabilized.


Suitable for outdoor use: garden, court, porch, walkway, residential area, commercial area, public parking, park.



E27



LED



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0097	FRESNEL 4008/BLK	E27 - max 60W	0,02	A>D	■
DB.0096	FRESNEL 4008/SLV	E27 - max 60W	0,02	A>D	■
DB.0869	FRESNEL 4008/BLK/OP	E27 - max 60W	0,02	A>D	■
DB.0866	FRESNEL 4008/SLV/OP	E27 - max 60W	0,02	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0824	FRESNEL 4008/BLK/OP/LED	LED 10W	4000K-1000lm	0,02	A+	■
DB.0865	FRESNEL 4008/SLV/OP/LED	LED 10W	4000K-1000lm	0,02	A+	■

Remote driver included - Service life: 50.000 h.



# Fresnel 4009

Light fitting with base and lid in resin material Duralighting®; post in extruded aluminium; diffuser in transparent or opal (OP) polycarbonate UV stabilized.


Suitable for outdoor use: garden, court, porch, walkway, residential area, commercial area, public parking, park.



E27



LED



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0162	FRESNEL 4009/BLK	E27 - max 60W	0.025	A>D	■
DB.0411	FRESNEL 4009/SLV	E27 - max 60W	0.025	A>D	■
DB.0870	FRESNEL 4009/BLK/OP	E27 - max 60W	0.025	A>D	■
DB.0871	FRESNEL 4009/SLV/OP	E27 - max 60W	0.025	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0873	FRESNEL 4009/BLK/OP/LED	LED 10W	4000K-1000lm	0.025	A+	■
DB.0872	FRESNEL 4009/SLV/OP/LED	LED 10W	4000K-1000lm	0.025	A+	■

Remote driver included - Service life: 50.000 h.



IP44



CE



U.V.  
RESISTANT







# Fresnel 4010

Light fitting with base and lid in resin material Duralighting®; post in extruded aluminium; diffuser in transparent or opal (OP) polycarbonate UV stabilized.


Suitable for outdoor use: garden, court, porch, walkway, residential area, commercial area, public parking, park.



E27



LED



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0098	FRESNEL 4010/BLK	E27 - max 60W	0.035	A>D	■
DB.0340	FRESNEL 4010/SLV	E27 - max 60W	0.035	A>D	■
DB.0874	FRESNEL 4010/BLK/OP	E27 - max 60W	0.035	A>D	■
DB.0875	FRESNEL 4010/SLV/OP	E27 - max 60W	0.035	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0876	FRESNEL 4010/BLK/OP/LED	LED 10W	4000K-1000lm	0.035	A+	■
DB.0877	FRESNEL 4010/SLV/OP/LED	LED 10W	4000K-1000lm	0.035	A+	■

Remote driver included - Service life: 50.000 h.



IP44



U.V. RESISTANT



# Fresnel 4011

Light fitting with base and lid in resin material Duralighting®;  
post in extruded aluminium;  
diffuser in transparent or opal (OP) polycarbonate UV stabilized.


Suitable for outdoor use: garden, court, porch, walkway,  
residential area, commercial area, public parking, park.



E27



LED



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0213	FRESNEL 4011/BLK	E27 - max 60W	0.04	A>D	■
DB.0277	FRESNEL 4011/SLV	E27 - max 60W	0.04	A>D	■
DB.0878	FRESNEL 4011/BLK/OP	E27 - max 60W	0.04	A>D	■
DB.0879	FRESNEL 4011/SLV/OP	E27 - max 60W	0.04	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0890	FRESNEL 4011/BLK/OP/LED	LED 10W	4000K-1000lm	0.04	A+	■
DB.0891	FRESNEL 4011/SLV/OP/LED	LED 10W	4000K-1000lm	0.04	A+	■


Remote driver included - Service life: 50.000 h.



# Fresnel 4012

Light fitting with body in resin material Duralighting®; diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, balcony.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0017	FRESNEL 4012/BLK	E27 - max 60W	0,015	A>D	■
DB.0095	FRESNEL 4012/SLV	E27 - max 60W	0,015	A>D	■
DB.0880	FRESNEL 4012/BLK/OP	E27 - max 60W	0,015	A>D	■
DB.0881	FRESNEL 4012/SLV/OP	E27 - max 60W	0,015	A>D	■



## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0882	FRESNEL 4012/BLK/OP/LED	LED 10W	4000K-1000lm	0,015	A+	■
DB.0883	FRESNEL 4012/SLV/OP/LED	LED 10W	4000K-1000lm	0,015	A+	■

Remote driver included - Service life: 50.000 h.

IP44 CE U.V. RESISTANT



# Minilite

The different shapes, dimensions and color of MINILITE make this range the hugest and most complete of DURALITE production. Thanks to their numerous applications and essential style, the MINILITE are the ideal solution for the private garden, court and small urban areas.



ML 01



ML 07



ML 03



ML 04



ML 05



6002

## MATERIAL

**BODY** and **POST** in resin material **DURALIGHTING®**: a patented material studied to resist against UV-rays, corrosion and all weather agents. It can be used in any climatic areas especially in marine environments and tropical climates. The **DURALIGHTING®** is a strong and resistant material with a polished and smooth finish. **DIFFUSER** in polycarbonate UV stabilized.

## TECHNICAL DETAILS

PROTECTION DEGREE: **IP44**  
ISOLATION CLASS: **II**  
COLOR: **bronze / silver**  
LAMP: **E27 / LED**  
Silicon gasket  
Stainless steel screws


## APPLICATIONS

- GARDEN
- PORCH
- COURT
- WALKWAY
- PEDESTRIAN AREA

# Minilite ML 01

Spotlight with body in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: private garden, court, porch, balcony, small pillar.




## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0022	ML 01/BR	E14 - max 40W	0,008	A>D	BR
DB.0412	ML 01/SLV	E14 - max 40W	0,008	A>D	SLV

# Minilite ML 07

Spotlight with body in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: private garden, court, porch, balcony.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0007	ML 07/BR	E14 - max 40W	0,002	A > D	BR
DB.0413	ML 07/SLV	E14 - max 40W	0,002	A > D	SLV

IP44 CE U.V. RESISTANT





# Minilite ML 03/310


Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.



Fixing Minilite into the ground



Fixing Minilite into concrete (or masonry elements)

## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0008	ML 03/310/BR	E27 - max 40W	0,015	A>D	BR
DB.0076	ML 03/310/SLV	E27 - max 40W	0,015	A>D	SLV

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0884	ML 03/310/BR/LED	LED 4,5W	4000K- 450lm	0,015	A+	BR
DB.0892	ML 03/310/SLV/LED	LED 4,5W	4000K- 450lm	0,015	A+	SLV



Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h.**

# Minilite ML 03/510


Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.



Fixing Minilite into the ground



Fixing Minilite into concrete (or masonry elements)

## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0009	ML 03/510/BR	E27 - max 40W	0,015	A > D	BR
DB.0077	ML 03/510/SLV	E27 - max 40W	0,015	A > D	SLV

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0893	ML 03/510/BR/LED	LED 4,5W	4000K- 450lm	0,015	A+	BR
DB.0894	ML 03/510/SLV/LED	LED 4,5W	4000K- 450lm	0,015	A+	SLV

Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h.**

IP44 U.V. RESISTANT




# Minilite ML 03/710

Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.

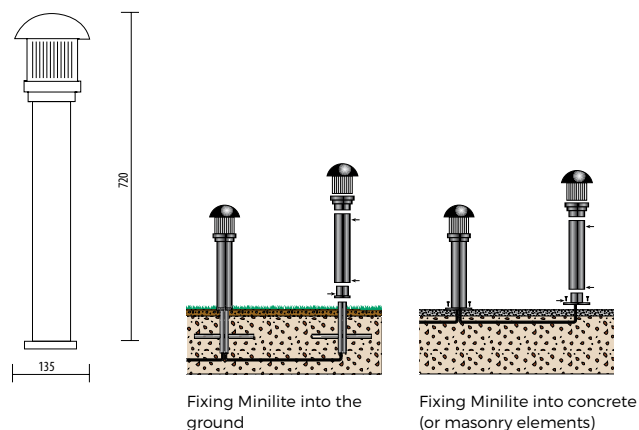

## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0010	ML03/710/BR	E27 - max 40W	0,025	A > D	BR
DB.0078	ML 03/710/SLV	E27 - max 40W	0,025	A > D	SLV

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0895	ML 03/710/BR/LED	LED 4,5W	4000K- 450lm	0,025	A+	BR
DB.0896	ML 03/710/SLV/LED	LED 4,5W	4000K- 450lm	0,025	A+	SLV


Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h.**

# Minilite ML 03/MT



Spotlight with body in resin material Duralighting® complete with base for installation on the wall; diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, balcony, residential area.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0056	ML 03/MT/BR	E27 - max 40W	0,008	A>D	BR
DB.0057	ML 03/MT/SLV	E27 - max 40W	0,008	A>D	SLV

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0885	ML 03/MT/BR/LED	LED 4,5W	4000K- 450lm	0,008	A+	BR
DB.0897	ML 03/MT/SLV/LED	LED 4,5W	4000K- 450lm	0,008	A+	SLV

Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h**.

IP44 CE U.V. RESISTANT





# Minilite ML 04/310


Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included.

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.



Fixing Minilite into the ground



Fixing Minilite into concrete (or masonry elements)

## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0002	ML 04/310/BR	E27 - max 40W	0,015	A > D	BR
DB.0267	ML 04/310/SLV	E27 - max 40W	0,015	A > D	SLV

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0955	ML 04/310/BR/LED	LED 4,5W	4000K- 450lm	0,015	A+	BR
DB.0886	ML 04/310/SLV/LED	LED 4,5W	4000K- 450lm	0,015	A+	SLV

Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h.**

IP44 CE U.V. RESISTANT



# Minilite ML 04/510




Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included.

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.



Fixing Minilite into the ground



Fixing Minilite into concrete (or masonry elements)

## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0003	ML 04/510/BR	E27 - max 40W	0,015	A > D	BR
DB.0414	ML 04/510/SLV	E27 - max 40W	0,015	A > D	SLV

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0822	ML 04/510/BR/LED	LED 4,5W	4000K- 450lm	0,015	A+	BR
DB.0956	ML 04/510/SLV/LED	LED 4,5W	4000K- 450lm	0,015	A+	SLV

Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h.**




# Minilite ML 04/710

Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included.

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.

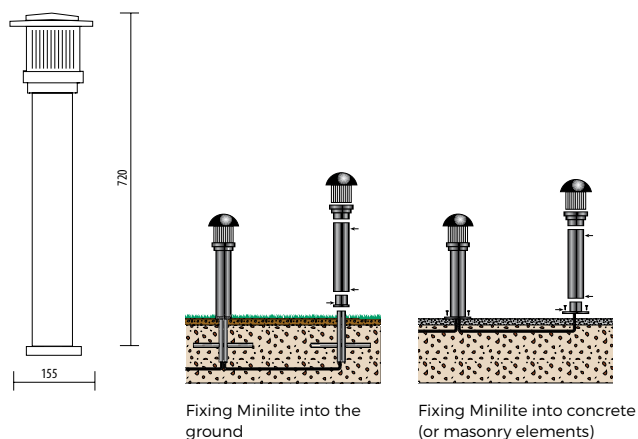

## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0004	ML 04/710/BR	E27 - max 40W	0,025	A > D	BR
DB.0415	ML 04/710/SLV	E27 - max 40W	0,025	A > D	SLV

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0957	ML 04/710/BR/LED	LED 4,5W	4000K- 450lm	0,025	A+	BR
DB.0958	ML 04/710/SLV/LED	LED 4,5W	4000K- 450lm	0,025	A+	SLV

Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h.**








# Minilite ML 04/MT



Spotlight with body in resin material Duralighting® complete with base for installation on the wall; diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, balcony, residential area.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0059	ML 04/MT/BR	E27 - max 40W	0,008	A>D	BR
DB.0058	ML 04/MT/SLV	E27 - max 40W	0,008	A>D	SLV

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0959	ML 04/MT/BR/LED	LED 4,5W	4000K- 450lm	0,008	A+	BR
DB.0887	ML 04/MT/SLV/LED	LED 4,5W	4000K- 450lm	0,008	A+	SLV

Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h**.


IP44 CE U.V. RESISTANT

# Minilite ML 05/310

Spotlight with body and post in resin material Duralighting®, tempered glass diffuser.

Fixing kit included.

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.

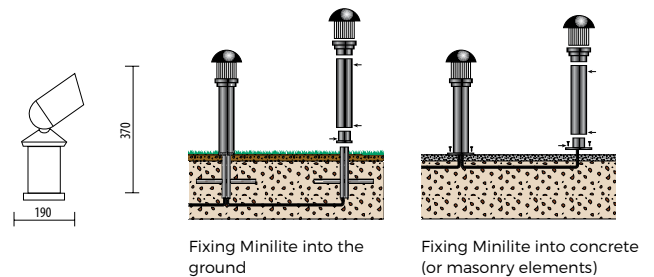

## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0101	ML 05/310/BR	E27 - max 40W	0,015	A > D	BR
DB.0060	ML 05/310/SLV	E27 - max 40W	0,015	A > D	SLV

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0889	ML 05/310/BR/LED	LED 4,5W	4000K- 450lm	0,015	A+	BR
DB.0898	ML 05/310/SLV/LED	LED 4,5W	4000K- 450lm	0,015	A+	SLV


Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h.**

# Minilite ML 05/510

Spotlight with body and post in resin material Duralighting®; tempered glass diffuser.

Fixing kit included.

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.

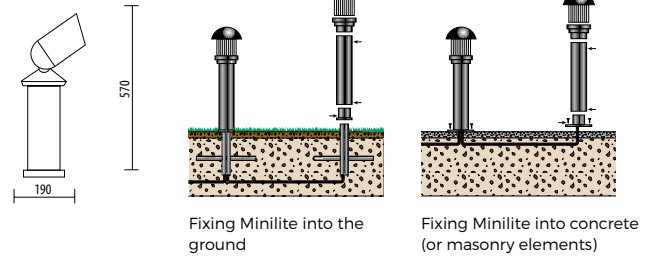

## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0102	ML 05/510/BR	E27 - max 40W	0,015	A > D	BR
DB.0061	ML 05/510/SLV	E27 - max 40W	0,015	A > D	SLV

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0791	ML 05/510/BR/LED	LED 4,5W	4000K-450lm	0,015	A+	BR
DB.0899	ML 05/510/SLV/LED	LED 4,5W	4000K-450lm	0,015	A+	SLV

Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h.**

IP44 □ CE U.V. RESISTANT




# Minilite ML 05/710

Spotlight with body and post in resin material Duralighting®, tempered glass diffuser.

Fixing kit included.

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.

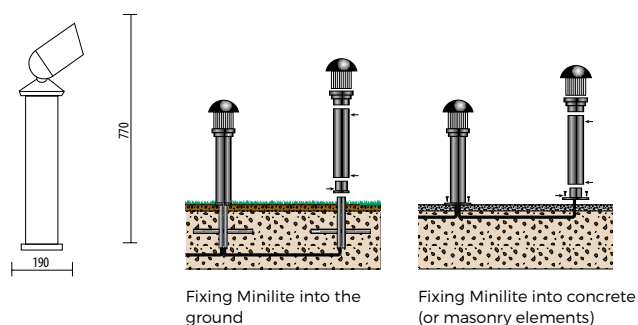

## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0103	ML 05/710/BR	E27 - max 40W	0,025	A > D	BR
DB.0062	ML 05/710/SLV	E27 - max 40W	0,025	A > D	SLV

## LED


CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0820	ML 05/710/BR/LED	LED 4,5W	4000K-450lm	0,025	A+	BR
DB.0900	ML 05/710/SLV/LED	LED 4,5W	4000K-450lm	0,025	A+	SLV

Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h.**

# Minilite ML 05/MT

Spotlight with body in resin material Duralighting® complete with base for installation on the wall; tempered glass diffuser.

Suitable for outdoor use: garden, court, porch, balcony, residential area.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0100	ML 05/MT/BR	E27 - max 40W	0,008	A>D	BR
DB.0066	ML 05/MT/SLV	E27 - max 40W	0,008	A>D	SLV

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0821	ML 05/MT/BR/LED	LED 4,5W	4000K- 1000lm	0,008	A+	BR
DB.0901	ML 05/MT/SLV/LED	LED 4,5W	4000K- 1000lm	0,008	A+	SLV

Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h**.



IP44    U.V. RESISTANT  

# Minilite 6002/310


Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included.

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.



Fixing Minilite into the ground



Fixing Minilite into concrete (or masonry elements)

## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0039	6002/310/BR	E27 - max 40W	0,015	A > D	BR
DB.0042	6002/310/SLV	E27 - max 40W	0,015	A > D	SLV

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0888	6002/310/BR/LED	LED 4,5W	4000K-450lm	0,015	A+	BR
DB.0960	6002/310/SLV/LED	LED 4,5W	4000K-450lm	0,015	A+	SLV



Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h.**

# Minilite 6002/510


Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included.

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.



Fixing Minilite into the ground



Fixing Minilite into concrete (or masonry elements)

## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0040	6002/510/BR	E27 - max 40W	0,015	A>D	BR
DB.0043	6002/510/SLV	E27 - max 40W	0,015	A>D	SLV

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0961	6002/510/BR/LED	LED 4,5W	4000K-450lm	0,015	A+	BR
DB.0962	6002/510/SLV/LED	LED 4,5W	4000K-450lm	0,015	A+	SLV

Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h.**

IP44 CE U.V. RESISTANT






# Minilite 6002/710

Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included.

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.

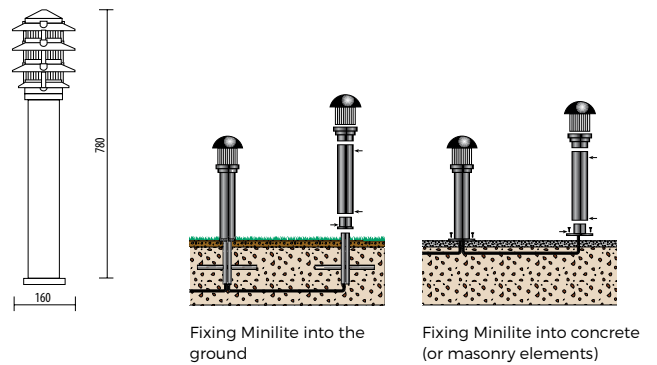

Fixing Minilite into the ground

Fixing Minilite into concrete (or masonry elements)

## E27

CODE	DESCRIPTION	LAMP	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0041	6002/710/BR	E27 - max 40W	0,025	A > D	BR
DB.0044	6002/710/SLV	E27 - max 40W	0,025	A > D	SLV

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0963	6002/710/BR/LED	LED 4,5W	4000K-450lm	0,025	A+	BR
DB.0964	6002/710/SLV/LED	LED 4,5W	4000K-450lm	0,025	A+	SLV


Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h.**

# Minilite 6002/B



Spotlight with body and base in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, small pillar, residential area.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0223	6002/B/BLK	E27 - max 40W	0,015	A>D	Black
DB.0133	6002/B/BR	E27 - max 40W	0,015	A>D	Brown
DB.0965	6002/B/SLV	E27 - max 40W	0,015	A>D	Grey

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0966	6002/B/BLK/LED	LED 4,5W	4000K-450lm	0,015	A+	Black
DB.0967	6002/B/BR/LED	LED 4,5W	4000K-450lm	0,015	A+	Brown
DB.0968	6002/B/SLV/LED	LED 4,5W	4000K-450lm	0,015	A+	Grey

Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h.**


IP44 CE U.V. RESISTANT

# Minilite 6002/ML



Spotlight with body and arm in resin material Duralighting® complete with base for installation on the wall; diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, small pillar, residential area.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0273	6002/ML/BLK	E27 - max 40W	0,02	A>D	Black
DB.0099	6002/ML/BR	E27 - max 40W	0,02	A>D	Brown
DB.0463	6002/ML/SLV	E27 - max 40W	0,02	A>D	Grey

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0970	6002/ML/BLK/LED	LED 4,5W	4000K-450lm	0,02	A+	Black
DB.0823	6002/ML/BR/LED	LED 4,5W	4000K-450lm	0,02	A+	Brown
DB.0971	6002/ML/SLV/LED	LED 4,5W	4000K-450lm	0,02	A+	Grey


Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h.**

# Minilite 6002/P



Spotlight with body and spike in resin material Duralighting®; diffuser in polycarbonate UV stabilized; rubber cable with schuko plug.

Suitable for outdoor use: garden, residential area, park, flowerbed.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0011	6002/P/BLK	E27 - max 40W	0.02	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m³)	ENERGY CLASS	COLOR
DB.0696	6002/P/BLK/LED	LED 4.5W	4000K-450lm	0.02	A+	■

Module 10 LED - Direct connection to 230V (driver not necessary) - Service life: 50.000 h.

IP44 □ CE ▽ U.V. RESISTANT ⚡ ⚠ ♻️



# Par

Adjustable floodlights with 1 or 2 lights to be fixed in the ground with spike or to be mounted on the wall. With their uniform and large beam of light, the PAR were studied to create a pleasant light effect in the green areas like private gardens, parks and flowerbeds and to bring out all details.



PAR 38 1/P



PAR 38 1/M



PAR 20 1/P



PAR 20 1/M



PAR PL/M



PAR PRESA

## MATERIAL

**BODY** in resin material **DURALIGHTING®**; a patented material studied to resist against UV-rays, corrosion and all weather agents.

It can be used in any climatic areas especially in marine environments and tropical climates.

The **DURALIGHTING®** is a strong and resistant material with a polished and smooth finish.

**DIFFUSER**, if present, in polycarbonate UV stabilized.

## TECHNICAL DETAILS

**PROTECTION DEGREE: IP55**

**ISOLATION CLASS: II**

**COLOR: black / bronze**

Silicon gasket

Stainless steel screws

Rubber cable of 2.50 m with schuko plug in spike version

## APPLICATIONS


- GARDEN
- WALKWAY
- COURT
- WALKWAY
- PEDESTRIAN AREA

# Par 38 1/P



Spotlight single light with body and spike in resin material Duralighting®; rubber cable with schuko plug.

Suitable for outdoor use: garden, flowerbed, residential area, commercial area, park.



## E27


CODE	DESCRIPTION	LAMP	VOLUME (Single Box)	VOLUME (Multiple Box)	ENERGY CLASS	COLOR
DB.0012	PAR 38 1/P/BLK	E27 - PAR38 max 100W	0,006	0,05 (15 pcs)	A>D	■

# Par 38 1/M



Spotlight single light with body in resin material Duralighting® complete with base for installation on the wall.

Suitable for outdoor use: garden, court, balcony, porch, residential area.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (Single Box)	VOLUME (Multiple Box)	ENERGY CLASS	COLOR
DB.0049	PAR 38 1/M/BLK	E27 - PAR38 max 100W	0,0025	0,05 (20 pcs)	A>D	■

IP55    U.V.  
RESISTANT  






# Par 38 2/P



Spotlight two lights with body and spike in resin material Duralighting®; rubber cable with schuko plug.

Suitable for outdoor use: garden, flowerbed, residential area, commercial area, park.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (Single Box)	VOLUME (Multiple Box)	ENERGY CLASS	COLOR
DB.0034	PAR 38 2/P/BLK	E27 - PAR38 max 100W	0,0075	0,05 (8 pcs)	<b>A&gt;D</b>	■


IP55 U.V. RESISTANT



# Par 38 2/M

Spotlight two lights with body in resin material Duralighting® complete with base for installation on the wall.

Suitable for outdoor use: garden, court, balcony, porch, residential area.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (Single Box)	VOLUME (Multiple Box)	ENERGY CLASS	COLOR
DB.0190	PAR 38 2/M/BLK	E27 - PAR38 max 50W	0,005	0,05 (10 pcs)	A>D	■


IP55    U.V.  
RESISTANT  

# Par 20 1/P



Spotlight single light with body and spike in resin material Duralighting®; rubber cable with schuko plug.

Suitable for outdoor use: garden, flowerbed, residential area, commercial area, park.



## E27


CODE	DESCRIPTION	LAMP	VOLUME (Single Box)	VOLUME (Multiple Box)	ENERGY CLASS	COLOR
DB.0032	PAR 20 1/P/BLK	E27 - PAR20 max 50W	0,006	0,05 (15 pcs)	A>D	■

# Par 20 1/M



Spotlight single light with body in resin material  
Duralighting® complete with base for installation on the wall.

Suitable for outdoor use: garden, court, balcony, porch, residential area.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (Single Box)	VOLUME (Multiple Box)	ENERGY CLASS	COLOR
DB.0048	PAR 20 1/M/BLK	E27 - PAR20 max 50W	0,0025	0,05 (20 pcs)	A>D	■


IP55    U.V.  
RESISTANT  

# Par 20 2/P



Spotlight two lights with body and spike in resin material Duralighting®; rubber cable with schuko plug.

Suitable for outdoor use: garden, flowerbed, residential area, commercial area, park.




## E27

CODE	DESCRIPTION	LAMP	VOLUME (Single Box)	VOLUME (Multiple Box)	ENERGY CLASS	COLOR
DB.0033	PAR 20 2/P/BLK	E27 - PAR20 max 50W	0,0075	0,05 (8 pcs)	A>D	■

# Par 20 2/M

Spotlight two lights with body in resin material Duralighting®; complete with base for installation on the wall.

Suitable for outdoor use: garden, court, balcony, porch, residential area.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (Single Box)	VOLUME (Multiple Box)	ENERGY CLASS	COLOR
DB.0454	PAR 20 2/M/BLK	E27 - PAR20 max 50W	0,005	0,05 (10 pcs)	A>D	■

IP55    U.V.  
RESISTANT   




# Par 20 R 1/P



Spotlight single light with body and spike in resin material Duralighting®; rubber cable with schuko plug.

Suitable for outdoor use: garden, flowerbed, residential area, commercial area, park.




## E27

CODE	DESCRIPTION	LAMP	VOLUME (Single Box)	VOLUME (Multiple Box)	ENERGY CLASS	COLOR
DB.0024	PAR 20 R 1/P/BLK	E27 - PAR20 max 50W	0,006	0,05 (15 pcs)	A>D	■

# Par 20 R 1/M

Spotlight single light with body in resin material Duralighting® complete with base for installation on the wall.

Suitable for outdoor use: garden, court, balcony, porch, residential area.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (Single Box)	VOLUME (Multiple Box)	ENERGY CLASS	COLOR
DB.0025	PAR 20 R 1/M/BLK	E27 - PAR20 max 50W	0,0025	0,05 (20 pcs)	A>D	Black
DB.0275	PAR 20 R 1/M/BR	E27 - PAR20 max 50W	0,0025	0,05 (20 pcs)	A>D	Brown


IP55    U.V. RESISTANT   



# Par 20 R/310

Spotlight with body and post in resin material Duralighting®.  
Fixing kit included

Suitable for outdoor use: private garden, court, porch,  
walkway, residential area, park.

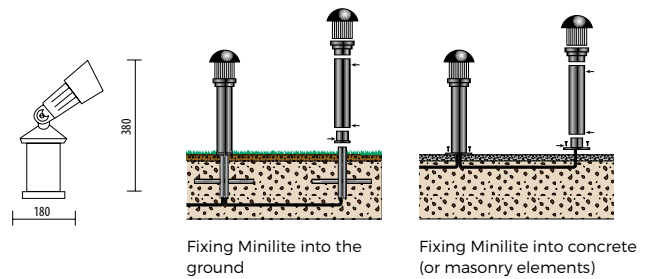

## E27


CODE	DESCRIPTION	LAMP	VOLUME (Single Box)	ENERGY CLASS	COLOR
DB.0416	PAR 20 R/310/BR	E27 - PAR20 max 50W	0,015	A>D	

IP55    U.V.  
RESISTANT   

# Par 20 R/510

Spotlight with body and post in resin material Duralighting®.  
Fixing kit included.

Suitable for outdoor use: private garden, court, porch,  
walkway, residential area, park.

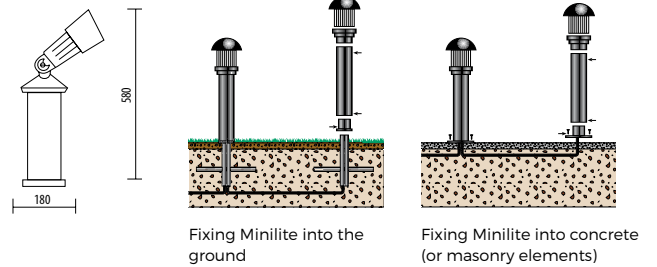

## E27


CODE	DESCRIPTION	LAMP	VOLUME (Single Box)	ENERGY CLASS	COLOR
DB.0274	PAR 20 R/510/BR	E27 - PAR20 max 50W	0,015	A>D	■



# Par 20 R/710

Spotlight with body and post in resin material Duralighting®. Fixing kit included.

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.

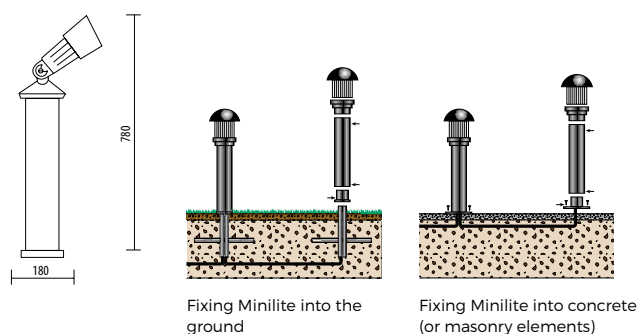

## E27

CODE	DESCRIPTION	LAMP	VOLUME (Single Box)	ENERGY CLASS	COLOR
DB.0417	PAR 20 R/710/BR	E27 - PAR20 max 50W	0,025	A>D	

IP55    U.V. RESISTANT   




# Par PL/M



Spotlight single light with body in resin material Duralighting® complete with base for installation on the wall.  
Diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, balcony, porch, residential area.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (Single Box)	VOLUME (Multiple Box)	ENERGY CLASS	COLOR
DB.0245	PAR PL/M/BLK	E27 - CFL max 15W	0,005	0,05 (8 pcs)	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (Single Box)	VOLUME (Multiple Box)	ENERGY CLASS	COLOR
DB.1030	PAR PL/M/BLK/LED	LED 9W	4000K-650lm	0,005	0,05 (8 pcs)	A+	■

Module 21 LED - Direct connection to 230V (driver not necessary) - Service life: 50.000 h.

IP55    U.V. RESISTANT   




# Par PL/P



Spotlight single light with body and spike in resin material  
Duralighting®; rubber cable with schuko plug.  
Diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: garden, flowerbed, residential area,  
commercial area, park.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (Single Box)	VOLUME (Multiple Box)	ENERGY CLASS	COLOR
DB.0083	PAR PL/P/BLK	E27 - CFL max 15W	0,01	0,05 (5 pcs)	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (Single Box)	VOLUME (Multiple Box)	ENERGY CLASS	COLOR
DB.1031	PAR PL/P/BLK/LED	LED 9W	4000K-650lm	0,005	0,05 (8 pcs)	A+>	■


Module 21 LED - Direct connection to 230V (driver not necessary) - Service life: 50.000 h.

# Par Presa



Double shuko socket mounted on spike with body in resin material Duralighting®; rubber cable with shuko plug.

Suitable for outdoor use: garden, flowerbed, residential area, commercial area, park.



CODE	DESCRIPTION	VOLUME (Single Box)	VOLUME (Multiple Box)	COLOR
DB.0023	PAR PRESA/BLK	0,005	0,035 (10 pcs)	■

IP55    U.V.  
RESISTANT   



# Temde



Is a classic light fitting suitable also for modern buildings.  
Its unique shape provides a uniform light distribution and its universal design makes the TEMDE always required.



TEMDE/UP-DWN

TEMDE/UP-DWN

## MATERIAL

**BODY** in resin material **DURALIGHTING®**: a patented material studied to resist against UV-rays, corrosion and all weather agents. It can be used in any climatic areas especially in marine environments and tropical climates. The **DURALIGHTING®** is a strong and resistant material with a polished and smooth finish.  
**DIFFUSER** in polycarbonate **UV** stabilized.

## TECHNICAL DETAILS

PROTECTION DEGREE: **IP55**  
ISOLATION CLASS: **II**  
COLOR: **black / silver**  
LAMP: **E27 / LED**  
Silicon gasket  
Stainless steel screws

## APPLICATIONS


- GARDEN
- COURT
- WALKWAY
- PORCH
- RESIDENTIAL AREA

# Temde



Light fitting with body in resin material Duralighting® complete with base for installation on the wall (up or down); diffuser in frosted polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, porch, residential area.

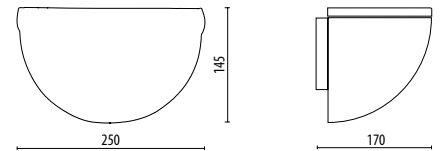

## E27


CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0594	TEMDE/UP-DWN/BLK	E27 - max 100W	0,007	A>D	■
DB.0696	TEMDE/UP-DWN/SLV	E27 - max 100W	0,007	A>D	■

# Temde



Light fitting with body in resin material Duralighting® complete with base for installation on the wall (up or down); diffuser in frosted polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, porch, residential area.

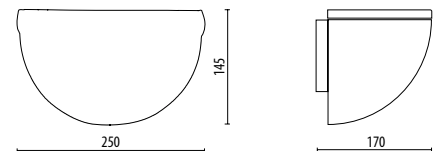

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0972	TEMDE/UP-DWN/BLK/LED	LED 15W	4000K-1600lm	0,007	A+	■
DB.0711	TEMDE/UP-DWN/SLV/LED	LED 15W	4000K-1600lm	0,007	A+	■

Module **30 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h**.



# Clio

in round version in two sizes, CLIO is a classic for light up the wall.  
Its simple and practical design meets different application requirements. It is especially suitable for garden, court, walkway, porch, residential area, commercial area.

Furthermore, the thermoplastic material and the high IP protection ensure extreme strength and an excellent aesthetic effect.



CLIO/280



CLIO/390

---

## MATERIAL

Body and frame in polycarbonate UV stabilized;  
diffuser in transparent opal acrylic.

## TECHNICAL DETAILS

PROTECTION DEGREE: **IP65**  
ISOLATION CLASS: **II**  
COLOR: **black / silver / white**  
LAMP: **E27**  
Aluminium reflector  
Stainless steel screws

## APPLICATIONS

- GARDEN
- COURT
- WALKWAY
- PORCH
- RESIDENTIAL AREA
- COMMERCIAL AREA
- PUBLIC PARKING




# Clio 280

Round applique diam. 280 for wall or ceiling fixing with body and frame in polycarbonate UV stabilized; diffuser in opal acrylic.

Aluminium reflector.

Suitable for outdoor use: garden, court, walkway, porch, residential area, commercial area, public parking.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.0996	CLIO/280/WHT/OP	E27 - CFL max 18W	0,02	A>D	White
DB.0997	CLIO/280/SLV/OP	E27 - CFL max 18W	0,02	A>D	Grey
DB.0998	CLIO/280/BLK/OP	E27 - CFL max 18W	0,02	A>D	Black



BLACK



WHITE


IP65 CE U.V. RESISTANT

# Clio 390

Round applique diam. 390 for wall or ceiling fixing with body and frame in polycarbonate UV stabilized; diffuser in opal acrylic.

Aluminium reflector.

Suitable for outdoor use: garden, court, walkway, porch, residential area, commercial area, public parking.



## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.1002	CLIO/390/WHT/OP	E27 - CFL max 21W	0,035	A>D	White
DB.1003	CLIO/390/SLV/OP	E27 - CFL max 21W	0,035	A>D	Grey
DB.1004	CLIO/390/BLK/OP	E27 - CFL max 21W	0,035	A>D	Black




BLACK



WHITE

IP65 U.V. RESISTANT

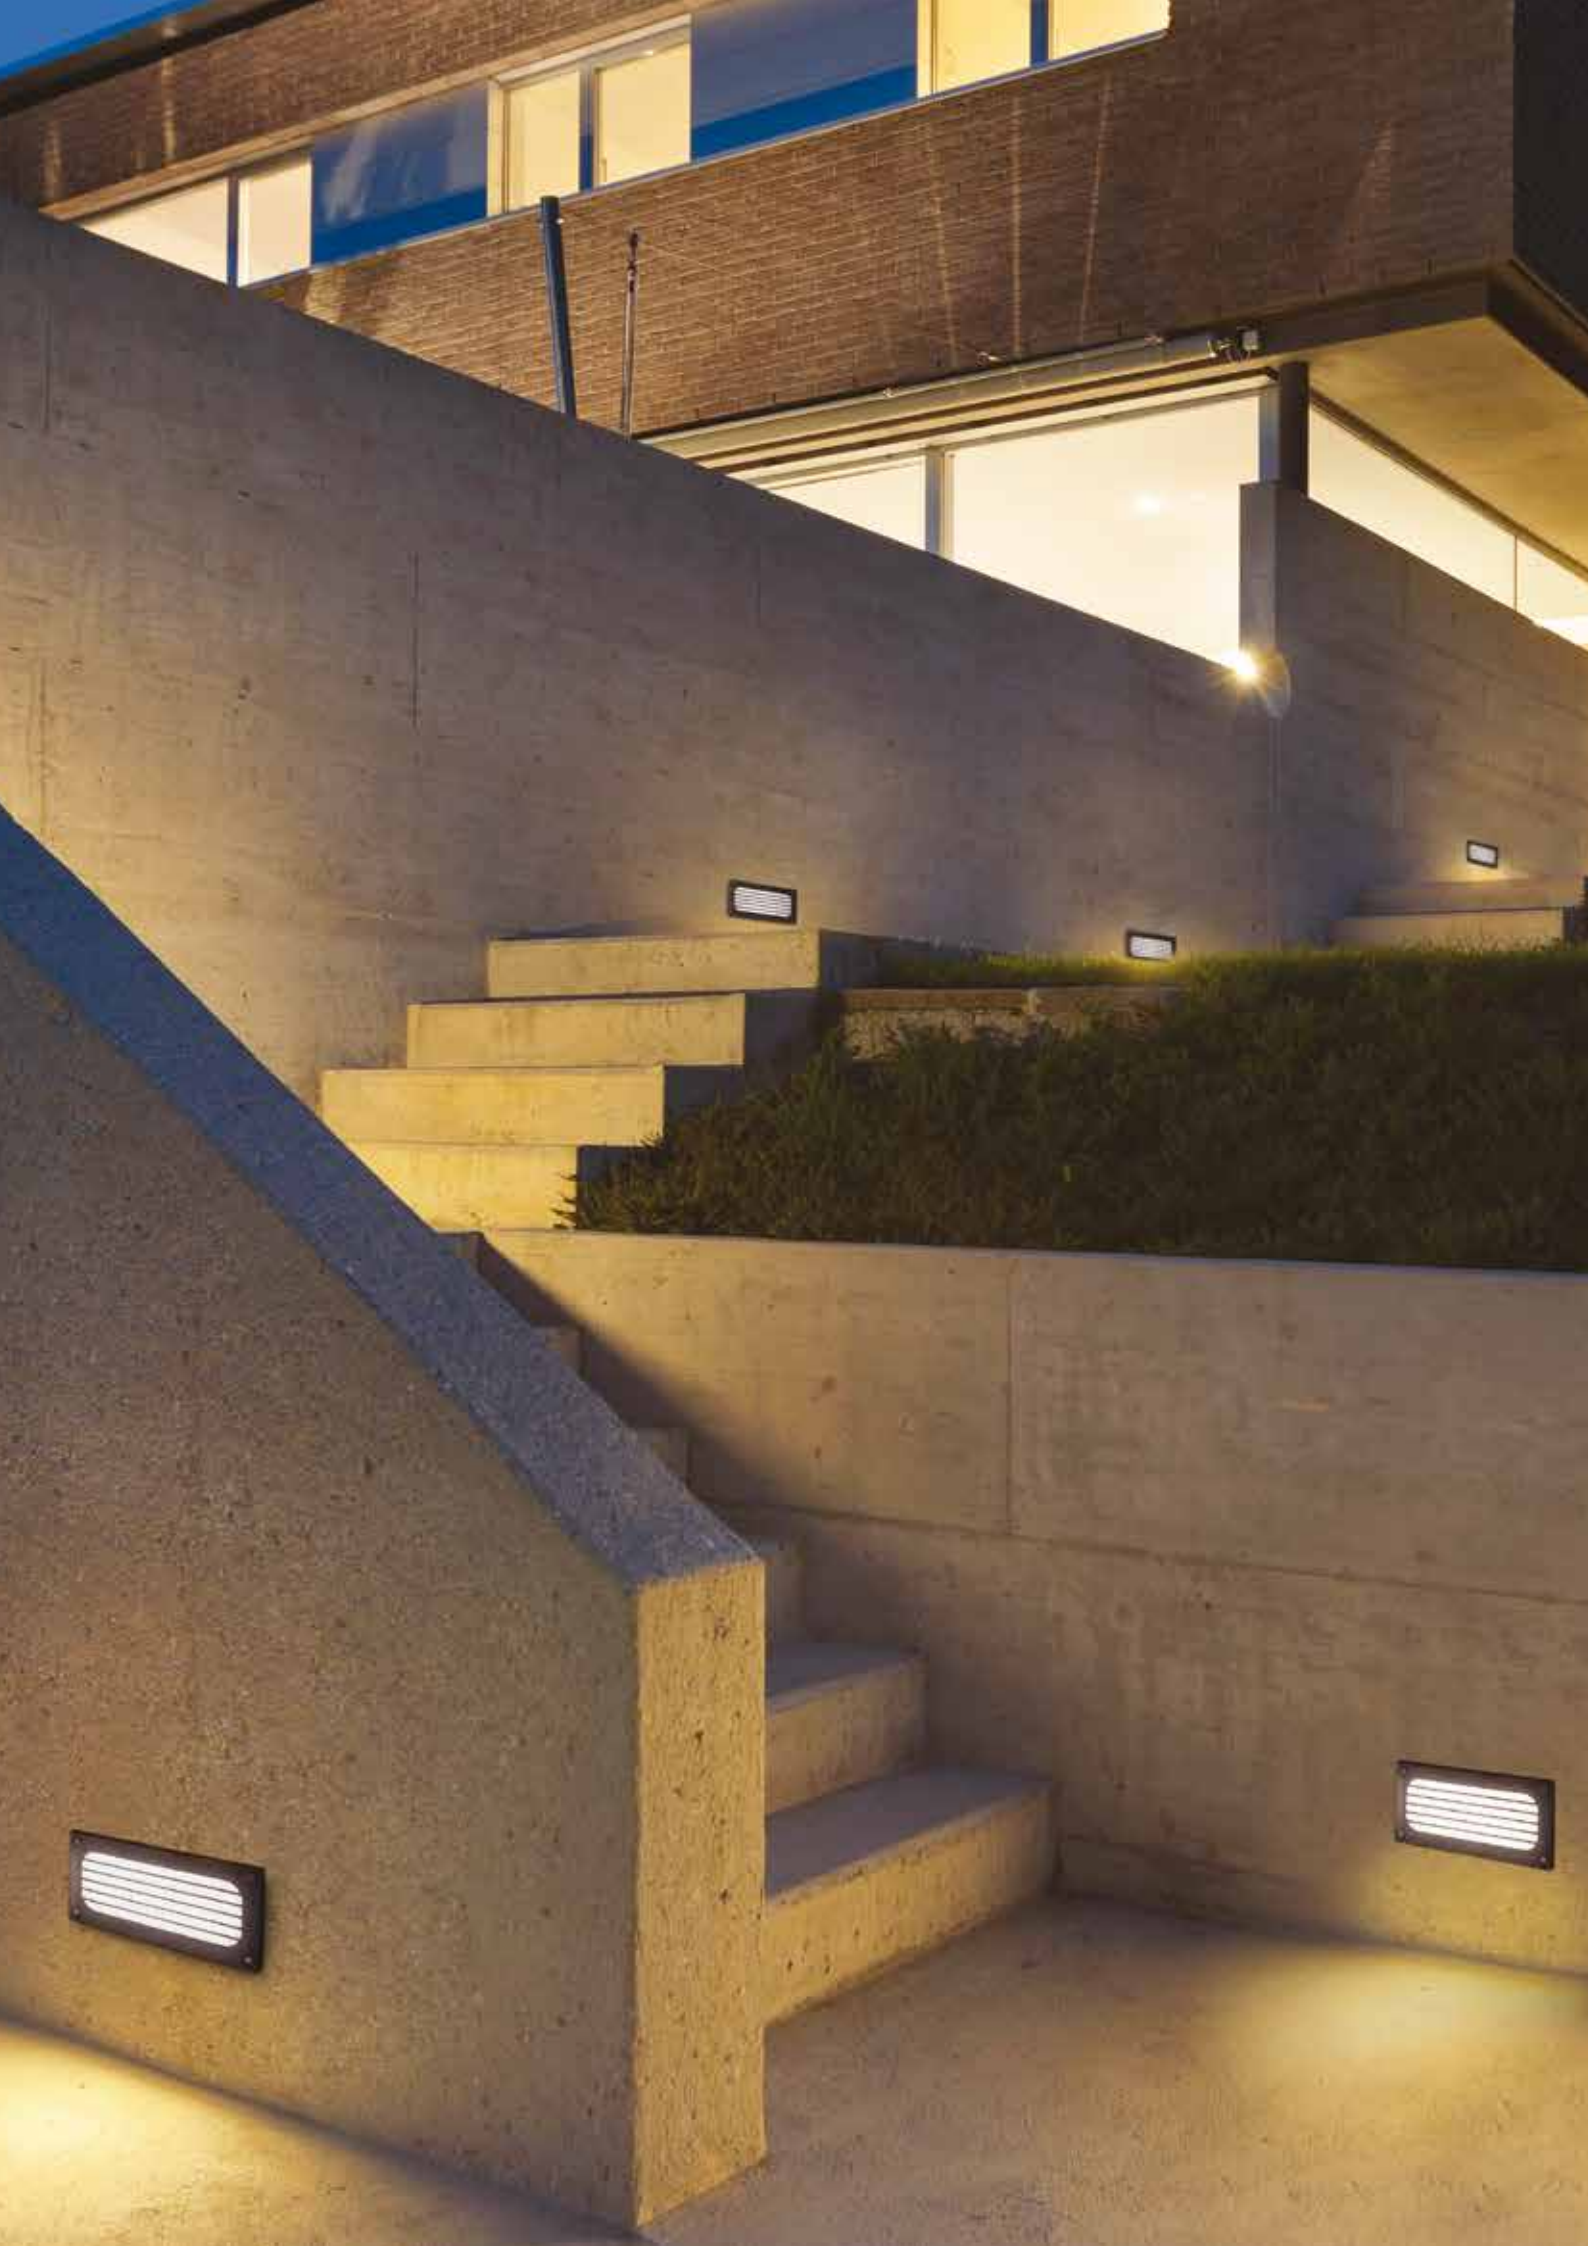

# Sidelight

Is a recessed light fitting for wall characterized by easy installation and resistant material. The SIDELIGHT is the ideal for the illumination of stairs, walkway and corridors. It is available with or without grid.



**SIDELIGHT 1**

**SIDELIGHT 2**

## MATERIAL

**BODY** and recessed box in reinforced thermoplastic,  
**DIFFUSER** in prismatic polycarbonate UV stabilized.

## TECHNICAL DETAILS

**PROTECTION DEGREE: IP55**  
**ISOLATION CLASS: II**  
**COLOR: black**  
**LAMP: E27 / LED**  
Silicon gasket  
Stainless steel screws


## APPLICATIONS

- GARDEN
- PORCH
- CORRIDOR
- STAIR

# Sidelight 1

Recessed light fitting with body and recessed box in reinforce thermoplastic; prismatic diffuser in polycarbonate UV stabilized.

Suitable for indoor and outdoor use: garden, porch, corridor, stair.

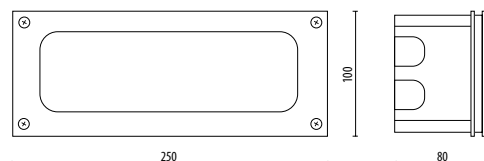

## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
0687	SIDELIGHT/1/BLK/E14	E14 - CFL max 8W (lamp. Incl)	0,005	A>D	■
0719	SIDELIGHT/1/BLK/G24	G24d2 - CFL max 18w	0,005	A>D	■

## LED


CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
0875	SIDELIGHT/1/BLK/LED	LED 4,5W	4000K- 450lm	0,005	A+	■

Module **10 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h**.

# Sidelight 2

Recessed light fitting with body and recessed box in reinforce thermoplastic; prismatic diffuser in polycarbonate UV stabilized.

Suitable for indoor and outdoor use: garden, porch, corridor, stair.

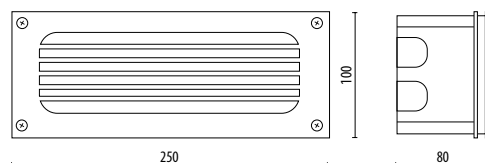

## E27

CODE	DESCRIPTION	LAMP	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
0699	SIDELIGHT/2/BLK/E14	E14 - CFL max 8W (lamp. Incl)	0,005	A>D	■
0871	SIDELIGHT/2/BLK/G24	G24d2 - CFL max 18w	0,005	A>D	■

## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
0876	SIDELIGHT/2/BLK/LED	LED 4,5W	4000K- 450lm	0,005	A+	■

Module 10 LED - Direct connection to 230V (driver not necessary) - Service life: 50.000 h.

IP55 CE U.V. RESISTANT



# The Classic with led



The union between the classic style and the modern LED technology has given rise to THE CLASSIC WITH LED: a wide range of classic lanterns with bright and uniform light in different shapes and configurations available for installation on wall, ground or ceiling.

The long life and resistance of DURALIGHTING material along with the high technology offered by the LED, give the customer the warranty of high quality product for lighting up residential areas and hotels with traditional and elegant style.



D.700/STR



D.377/STR



D.577/P/STL



D.50-MILANO

## MATERIAL

**LANTERN** in resin material **DURALIGHTING®**: a patented material studied to resist against UV-rays, corrosion and all weather agents. It can be used in any climatic areas especially in marine environments and tropical climates. The **DURALIGHTING®** is a strong and resistant material with a polished and smooth finish.  
**DIFFUSER** in polycarbonate UV stabilized.

## TECHNICAL DETAILS

PROTECTION DEGREE: **IP44 - IP55**  
ISOLATION CLASS: **II**  
COLOR: **black**  
hand shaded color: **black-rust, black-green, black-gold, black-silver**  
LAMP: **E27 / LED**  
Stainless steel screws

## APPLICATIONS

- GARDEN
- COURT
- PORCH
- BALCONY
- RESIDENTIAL AREA




# The Classic with LED D.700



Light fitting for wall fixing with lantern and arm in resin material Duralighting® complete with base for installation on the wall; diffuser in semi-opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, balcony, porch, residential area.



## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.1034	D.700/STR/BLK/LED	LED 10W	4000K-950lm	0,035	A+	■

Module **20 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h**.

Available in different color and configuration with E27 also.


Please check all details in **CLASSIC CATALOGUE**

# The Classic with LED D.377



Light fitting for wall fixing with lantern and arm in resin material Duralighting® complete with base for installation on the wall; diffuser in semi-opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, balcony, porch, residential area.



## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.1036	D.377/STR/BLK/LED	LED 10W	4000K-950lm	0,025	A+	■

Module **20 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h**.

Available in different color and configuration with E27 also.

Please check all details in **CLASSIC CATALOGUE**




# The Classic with LED D.577/P



Light fitting for wall fixing with lantern and arm in resin material Duralighting® complete with base for installation on the wall; diffuser in semi-opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, balcony, porch, residential area.



## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.1038	D.577/P/STL/BLK/LED	LED 10W	4000K-950lm	0,025	A+	■

Module **20 LED** - Direct connection to **230V** (driver not necessary) - Service life: **50.000 h.**


Available in different color and configuration with E27 also.

Please check all details in **CLASSIC CATALOGUE**



# The Classic with LED D.50-MILANO

Light fitting with lantern in resin material Duralighting®; resin material post reinforced with an internal galvanized steel pipe and polyurethane foam core adapted to guarantee a strong resistance to wind pressure; diffuser in polycarbonate in UV stabilized.




## LED

CODE	DESCRIPTION	LAMP	LED COLOR	VOLUME (m <sup>3</sup> )	ENERGY CLASS	COLOR
DB.1041	D.50-MILANO/DP212/1/BLK/LED	LED 25W	4000K-3400lm	0,25	A+	■

Remote driver included - Service life: 50.000 h.

Available in different color and configuration with E27-sodium-metal halide.

Please check all details in **CLASSIC CATALOGUE**



IP55 □ CE ▽ U.V. RESISTANT ♻️

# Technical Information

---

## Symbols

---



Product in compliance with European Union health, safety and environmental protection directive and regulations



Fixture suitable for installation on normally inflammable surfaces



UV-stabilized material.  
Anti-yellowing



Made in material which is resistant to vandalism acts



Range of temperature between -50 and +80 degrees



Fixture in recycling material

## Insulation Class

---



### CLASS I

Fixture equipped with primary insulation only.

The safety of the product is guaranteed by an additional protective conductor for earth.



### CLASS II

Product with double or reinforced insulation without earth devices.



### CLASS III

Product suitable for very low voltage

## Protection Degree IP

---

Degree of protection against penetration of solid (first number) and liquid (second number)

### IP23

Protected against penetration of solid bodies  $\phi \geq 12$  mm and protected against rain.

### IP44

Protected against penetration of solid bodies  $\phi \geq 1$  mm and against water sprays.

### IP65

Protected against penetration of dust and against water jets.

### IP40

Protected against penetration of solid bodies  $\phi \geq 1$  mm

### IP54

Protected against penetration of dust and against water

### IP67

Sealed against penetration of dust and protected against extensive quantity of water.

### IP43

Protected against penetration of solid bodies  $\phi > 1$  mm and

### IP55

Protected against penetration of dust and against water jets.


# Colors




**Black (BLK)**



**Bronze (BR)**



**Silver (SLV)**




**White (WHT)**


# Energy Efficiency Classes


Efficiency of the lamps or LED modules that are used as the light source in the luminaire.

**DURALITE**  
Hi-Tech Lighting Features


 This luminaire is compatible with bulbs of the energy classes:

A+  
A+  
A  
B  
C  
D  
E



874/2012 


**DURALITE**  
Hi-Tech Lighting Features

 This luminaire contains built-in LED lamps:

A+  
A+  
A  
B  
C  
D  
E

LED

The lamps cannot be changed in luminaire

874/2012 

# General Sale Conditions

---

- All prices are ex-works, unless otherwise agreed above.
- The order will be accepted after a written confirmation of the proforma invoice.
- The cancellation of order can be accepted only within 24 hours from the confirmation of proforma invoice.
- Transport or delivery by any means are at buyer's own risk.  
The company will not be liable for any damages after goods delivery to the carrier or the consigner, even if freight fees are included in the sale price.
- All DURALITE products are strictly inspected before delivery and they are guaranteed against production defects in compliance with European safety standards for 2 years.
- The company will judge from time to time its responsibility and in case of responsibility it will proceed to the replacement.
- The faulty pieces will be given back to DURALITE company at customer's expenses.
- The warranty doesn't cover the costs of transport, uninstallation, reinstallation.
- DURALITE S.r.l. company will not be liable for any damages arising from incorrect installation, misuse or use with components of other products.
- For any controversy, the court of Brescia (Italy) will have exclusive jurisdiction .  
All DURALITE S.r.l. products are produced in compliance with European safety standards

The DURALITE S.r.l. reserves the right to make improvements to the products described in this catalogue without giving prior notice

# DURALITE<sup>®</sup> sells all over the WORLD

---







**Duralite S.r.l.**  
via Brescia, 77  
25065 Lumezzane (BS) - Italy

Tel. +39 030 871421  
Fax +39 030 8976364

[info@duralite.it](mailto:info@duralite.it)  
[www.duralite.it](http://www.duralite.it)



**Duralite S.r.l.**  
via Brescia, 77  
25065 Lumezzane (BS) - Italy

Tel. +39 030 871421  
Fax +39 030 8976364

[info@duralite.it](mailto:info@duralite.it)  
[www.duralite.it](http://www.duralite.it)