


# MODERN

OUTDOOR LIGHTING



CATALOGUE 2023-2024

RESIN MATERIAL



# **MODERN**

OUTDOOR LIGHTING





## ABOUT US

**DURALITE was born out of a thirty-year strong experience in designing and manufacturing of aluminium tools and the same long presence in aluminium casting industry.**

Why not apply this vast experience even to the lighting technology?

Our painstaking products research, design and full development within the company are our key to propose ever modern and actual fixtures, capable of meeting any requirements in the residential lighting for outdoor use.

Each and every piece is the fruit of constant market research and continuous improvement.

Our perfect knowledge of the characteristics of the various materials to be used is the propelling force behind our ability to produce complete series of products with different aesthetic and technologic configuration capable of compete at international level and perfectly adapting to the ever-varying market we operate in today.

# THE QUALITY OF MADE IN ITALY



DURALITE products are painstakingly designed to reflect the class and finesse of the Italian design which has always been a symbol of style and quality.

The concept of quality remains an absolute priority: all product processing steps carried out in-house or externally meet the highest quality standards.

The concept of quality is also reflected in the workplace, in the services we offer to our customers, in our design and aesthetic choices, as well as in our product manufacturing and sales process.

Italian excellence is renowned and appreciated all over the world. As a brand, "Made in Italy" means perfection in detail, research, finesse, class and style.




# SERVICES

---



## Customer Care

Our website and constantly operating telephone lines help us to guarantee an efficient customer care service.



## Technical Support

Thanks to the experienced gathered over the years, at DURALITE we are in a position to offer both pre and after sales technical support.



## Just in Time

Is a system of supplying goods as close as possible to when they are actually needed. JIT is one of the propelling forces behind DURALITE. In-house production guarantees quick delivery time thus facilitating the customer in terms of sales and warehouse management.



## Eco-sustainability

All Duralite products are carried out in harmony with the environment that includes light control, material choice and production in conformity with natural environment.

# RESIN MATERIAL DURALIGHTING®

**Outdoor lighting requires painstaking search of materials and technologies most suitable to guarantee high resistance.**

Thus, not only did we - at **DURALITE** - conceive and patent a material which subsequently led to solid and long lasting products, but we also maintained a classy design and finishing: **DURALIGHTING®**.

**DURALIGHTING®** is a resin resistant to corrosion and caustic substances.

It is a UV-stabilized material resistant to any atmospheric agent.

Thus, thanks to this resistance, it is suitable for any climatic condition and above all in coastal areas with particularly high salt values.

Products made using **DURALIGHTING®** have a specific weight and smooth metal-like classy finishing.

In addition, **DURALIGHTING®** is not painted: the colour is in the raw material and thus no problems related to discoloration and fading, hence requiring least maintenance possible.



#### **ANTI CORROSION**

Resistant to any atmospheric agent



#### **UV STABILIZED**

Protected from the long-term UV degradation effects



#### **NO MAINTENANCE**

Painting not necessary  
– the color is in the paste of raw material-

SAFETY  
FIRST!

#### **DOUBLE INSULATION**

Not require a safety connection  
to electrical earth



#### **HIGH SPECIFIC WEIGHT**

Heavy and strong material



#### **ELEGANT STYLE AND SMOOTH FINISH**

High quality and great appearance

# LED Technology


---

At **DURALITE SRL** we always have a keen eye for technological development, innovation and quality without forgetting environmental protection and energy saving.

Guided by these principles, we - at **DURALITE** - offer the entire array of **DURALIGHTING®** resin products based on the LED technology.

We combine two extremely efficient elements, **DURALIGHTING®** and **LED**, conceived to guarantee long duration, and minimum environmental impact.

As a team, at **DURALITE SRL** we collaborate with top-notch experts in the lighting industry with the aim of conceiving and designing the topmost lighting solution so as to guarantee reliable quality products always at the forefront of the rapidly developing world of **LED** technology.

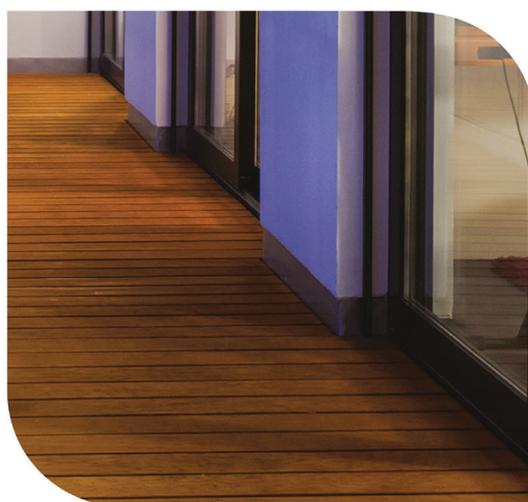

# LED and Environment

---

Taking care of the environment is a responsibility that everyone should feel accountable for. We - at **DURALITE** – want to promote this concept by applying everyday a **GO GREEN – SAVE GREEN** policy.

As a matter of fact, LEDs provide many environmental and economic advantages:

\* **life span and durability:** LEDs are solid state lighting devices that utilize semiconductor material instead of a filament or neon gas. Since LEDs don't use fragile components such as glass and filaments, LEDs are able to withstand shock, vibration and extreme temperature. LED lights last up to 6 times than other types of lights, reducing the requirement for frequent replacements which help reduce landfill and means also lower carbon emission.

\* **high energy efficient and reduced energy used:** LEDs are extremely energy efficient and consume up to 90% less power than any bulbs. Traditional filament lamps (bulbs) need to generate a lot of heat, to warm the filament and create light. Creating this heat wastes a significant amount of energy. In LED lamps, a far higher percentage of the power they use goes directly to generating light. In simple terms LEDs produce more light (measured in lumens) per watt than regular incandescent lamps, therefore they use less energy.

\* **ecologically friendly:** LED lights contain no toxic materials and no emit UV-rays or infrared radiation. They are 100% recyclable.



# Index

---

## Bollard



Pag.14  
Bollard 50 FT Led



Pag.15  
Bollard 80 FT Led



Pag.17  
Bollard 105 FT Led



Pag.18  
Bollard 50 FT Led



Pag.19  
Bollard 80 FT Led



Pag.21  
Bollard 105 FT Led



Pag.22  
Bollard 50 FT



Pag.23  
Bollard 80 FT



Pag.25  
Bollard 105 FT



Pag.26  
Bollard 50 FT



Pag.27  
Bollard 80 FT



Pag.29  
Bollard 105 FT



Pag.30  
Bollard 50 RD



Pag.31  
Bollard 80 RD



Pag.32  
Bollard 105 RD



Pag.33  
Bollard 50 RD



Pag.35  
Bollard 80 RD



Pag.36  
Bollard 105 RD



Pag.37  
Bollard 50 CN



Pag.38  
Bollard 80 CN



Pag.39  
Bollard 105 CN



Pag.40  
Bollard 50 Half Led



Pag.41  
Bollard 80 Half Led



Pag.42  
Bollard 105 Half Led



Pag.43  
Bollard 50 Half



Pag.44  
Bollard 80 Half



Pag.45  
Bollard 105 Half

# Index

---

## Futura



Pag.50  
Futura Pop



Pag.51  
Futura Pop Led



Pag.52  
Futura Rap



Pag.53  
Futura Rap Led



Pag.54  
Futura Rock 60



Pag.55  
Futura Rock 60 Led



Pag.56  
Futura Rock 100



Pag.57  
Futura Rock 100 Led



Pag.58  
Futura Swing 100



Pag.59  
Futura Swing 100 Led



Pag.60  
Futura Funk 60



Pag.61  
Futura Funk 60 Led



Pag.62  
Futura Funk 100



Pag.63  
Futura Funk 100 Led



Pag.64  
Futura Soul 60



Pag.65  
Futura Soul 60 Led



Pag.66  
Futura Soul 100



Pag.67  
Futura Soul 100 Led



Pag.68  
Futura Blues 100



Pag.69  
Futura Blues 100 Led



Pag.70  
Futura Jazz 60



Pag.71  
Futura Jazz 60 Led



Pag.72  
Futura Jazz 100



Pag.73  
Futura Jazz 100 Led

## Fresnel



Pag.76  
Fresnel 4008



Pag.77  
Fresnel 4009



Pag.79  
Fresnel 4010



Pag.80  
Fresnel 4011



Pag.81  
Fresnel 4012

# Index

## Minilite

|   |   |   |   |  |   |   |
|---|---|---|---|--|---|---|
|  |  |  |  |   |  |  |
| Pag.84<br>Minilite ML 06/310  | Pag.85<br>Minilite ML 06/510  | Pag.86<br>Minilite ML 06/710  | Pag.87<br>Minilite ML 06/MT   | Pag.88<br>Minilite ML 03/310   | Pag.89<br>Minilite ML 03/510  | Pag.90<br>Minilite ML 03/710  |
|  |  |  |  |  |  |  |
| Pag.91<br>Minilite ML 03/MT   | Pag.93<br>Minilite ML 04/310  | Pag.94<br>Minilite ML 04/510  | Pag.95<br>Minilite ML 04/710  | Pag.97<br>Minilite ML 04/MT  | Pag.98<br>Minilite 6002/310   | Pag.99<br>Minilite 6002/510   |
|  |  |  |  |  |  |   |
| Pag.100<br>Minilite 6002/710  | Pag.101<br>Minilite 6002/B  | Pag.102<br>Minilite 6002/ML   | Pag.103<br>Minilite 6002/P  | Pag.104<br>Minilite ML01   | Pag.105<br>Minilite ML07  |   |

## Par

|   |   |   |   |  |   |   |
|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |
| Pag.108<br>Par 38 1/P   | Pag.109<br>Par 38 1/M   | Pag.111<br>Par 38 2/P   | Pag.113<br>Par 38 2/M   | Pag.114<br>Par 20 1/P  | Pag.115<br>Par 20 1/M   | Pag.116<br>Par 20 2/P   |
|  |  |  |  |  |  |  |
| Pag.117<br>Par 20 2/M   | Pag.118<br>Par 20 R 1/P   | Pag.119<br>Par 20 R 1/M   | Pag.121<br>Par 20 R/310   | Pag.122<br>Par 20 R/510  | Pag.123<br>Par 20 R/710   | Pag.125<br>Par PL/M   |
|  |  |   |   |  |   |   |
| Pag.126<br>Par PL/P   | Pag.127<br>Par Presa  |   |   |  |   |   |

# Index

---

## Clio



Pag.130  
Clio 280



Pag.131  
Clio 390

## The Classic with Led



Pag.135  
The Classic with LED  
D.50 MILANO



# Bollard LED

Is the best-selling product of DURALITE. Thanks to its essential and elegant style, this traditional light fitting distinguishes from the BOLLARD currently on the market. Furthermore, the high quality of the resin material DURALIGHTING guarantees a 20-year lifetime of the product. By virtue of these features, it is best suitable for outdoor environment for public use such as parks, squares and commercial areas, as well as for private houses and gardens. The BOLLARD is now available also with frontal light for driveways and walkways. It is available with flat, round or cone lid in different heights and with transparent or opal diffuser.



D.BOLLARD FLAT LED



D.BOLLARD FLAT



D.BOLLARD HALF LED



D.BOLLARD HALF



D.BOLLARD ROUND



D.BOLLARD CONE

## MATERIAL

POST and LID in resin material DURALIGHTING®: a patented material studied to resist against UV-rays, corrosion and all weather agents. It can be used in any climatic areas especially in marine environments and tropical climates. The DURALIGHTING® is a strong and resistant material with a polished and smooth finish. DIFFUSER in transparent or opal polycarbonate UV stabilized.

## TECHNICAL DETAILS

PROTECTION DEGREE: IP65  
ISOLATION CLASS: II  
COLOR: black / silver  
LAMP: E27 / LED  
Aluminium louvre reflector in E27 version  
White cone in LED version  
Stainless steel screw  
Tamper resistant screw with key included  
Fixing kit TYPE F available on request

## APPLICATIONS

- GARDEN
- COURT
- WALKWAY
- COMMERCIAL AREA
- PUBLIC PARKING
- SQUARE
- PARK


# Bollard 50 Flat **LED**

BOLLARD with post and flat lid in resin material Duralighting®; diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)




| CODE    | DESCRIPTION               | LAMP    | LED COLOR | LUMINOUS FLUX | CRI | VOLUME | COLOR |
|---------|---------------------------|---------|-----------|---------------|-----|--------|-------|
| DB.0714 | D.BOLLARD/50/FT/SLV/LED/N | LED 18W | 4000K     | 2600lm        | 80  | 0,025  |       |
| DB.1311 | D.BOLLARD/50/FT/SLV/LED/W | LED 18W | 3000K     | 2400lm        | 80  | 0,025  |       |
| DB.0686 | D.BOLLARD/50/FT/BLK/LED/N | LED 18W | 4000K     | 2600lm        | 80  | 0,025  |       |
| DB.1310 | D.BOLLARD/50/FT/BLK/LED/W | LED 18W | 3000K     | 2400lm        | 80  | 0,025  |       |
| DB.1276 | D.BOLLARD/50/FT/COR/LED/N | LED 18W | 4000K     | 2600lm        | 80  | 0,025  |       |
| DB.1312 | D.BOLLARD/50/FT/COR/LED/W | LED 18W | 3000K     | 2400lm        | 80  | 0,025  |       |

Module 42 LED Remote Driver Included Service life: 50 000 h  
Available with daylight/motion sensor and emergency unit – see pag 46-47



4000K



3000K



BOLLARD



IP65 CE U.V. RESISTANT IK10


# Bollard 80 Flat **LED**

BOLLARD with post and flat lid in resin material Duralighting®; diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)




| CODE    | DESCRIPTION               | LAMP    | LED COLOR | LUMINOUS FLUX | CRI | VOLUME | COLOR   |
|---------|---------------------------|---------|-----------|---------------|-----|--------|---|
| DB.0710 | D.BOLLARD/80/FT/SLV/LED/N | LED 18W | 4000K     | 2600lm        | 80  | 0,035  |  |
| DB.1234 | D.BOLLARD/80/FT/SLV/LED/W | LED 18W | 3000K     | 2400lm        | 80  | 0,035  |  |
| DB.0687 | D.BOLLARD/80/FT/BLK/LED/N | LED 18W | 4000K     | 2600lm        | 80  | 0,035  |  |
| DB.1230 | D.BOLLARD/80/FT/BLK/LED/W | LED 18W | 3000K     | 2400lm        | 80  | 0,035  |  |
| DB.1277 | D.BOLLARD/80/FT/COR/LED/N | LED 18W | 4000K     | 2600lm        | 80  | 0,035  |  |
| DB.1279 | D.BOLLARD/80/FT/COR/LED/W | LED 18W | 3000K     | 2400lm        | 80  | 0,035  |  |

Module 42 LED - Remote Driver Included - Service life: 50.000 h.  
Available with daylight/motion sensor and emergency unit – see pag 46-47



4000K



3000K




IP65    U.V. RESISTANT IK10  



# Bollard 105 Flat **LED**



Available Opal Diffuser (OP)




BOLLARD with post and flat lid in resin material Duralighting® diffuser in transparent or opal (OP) polycarbonate UV stabilized.


Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.

| CODE    | DESCRIPTION                 | LAMP    | LED COLOR | LUMINOUS FLUX | CRI | VOLUME | COLOR |
|---------|-----------------------------|---------|-----------|---------------|-----|--------|-------|
| DB.0716 | D.BOLLARD/105/FT/SLV/LED/N  | LED 18W | 4000K     | 2600lm        | 80  | 0,045  |       |
| DB.1313 | D.BOLLARD/105/FT/SLV/LED/W  | LED 18W | 3000K     | 2400lm        | 80  | 0,045  |       |
| DB.0688 | D.BOLLARD/105/FT/BLK/LED/N  | LED 18W | 4000K     | 2600lm        | 80  | 0,045  |       |
| DB.1314 | D.BOLLARD/105/FT/BLK/LED/W  | LED 18W | 3000K     | 2400lm        | 80  | 0,045  |       |
| DB.1278 | D.BOLLARD/ 105/FT/COR/LED/N | LED 18W | 4000K     | 2600lm        | 80  | 0,045  |       |
| DB.1315 | D.BOLLARD/105/FT/COR/LED/W  | LED 18W | 3000K     | 2400lm        | 80  | 0,045  |       |

Module 42 LED - Remote Driver Included - Service life: 50.000 h.  
Available with daylight/motion sensor and emergency unit – see pag 46-47



4000K



3000K



IP65 CE U.V. RESISTANT IK10


# Bollard 50 Flat **LED**

BOLLARD with post and flat lid in resin material Duralighting®; diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.





Available Opal Diffuser (OP)



| CODE    | DESCRIPTION               | LAMP    | LED COLOR | LUMINOUS FLUX | CRI | VOLUME | COLOR |
|---------|---------------------------|---------|-----------|---------------|-----|--------|-------|
| DB.1276 | D.BOLLARD/50/FT/COR/LED/N | LED 18W | 4000K     | 2600lm        | 80  | 0,025  |       |
| DB.1312 | D.BOLLARD/50/FT/COR/LED/W | LED 18W | 3000K     | 2400lm        | 80  | 0,025  |       |
| DB.0714 | D.BOLLARD/50/FT/SLV/LED/N | LED 18W | 4000K     | 2600lm        | 80  | 0,025  |       |
| DB.1311 | D.BOLLARD/50/FT/SLV/LED/W | LED 18W | 3000K     | 2400lm        | 80  | 0,025  |       |
| DB.0686 | D.BOLLARD/50/FT/BLK/LED/N | LED 18W | 4000K     | 2600lm        | 80  | 0,025  |       |
| DB.1310 | D.BOLLARD/50/FT/BLK/LED/W | LED 18W | 3000K     | 2400lm        | 80  | 0,025  |       |

Module 42 LED - Remote Driver Included - Service life: 50.000 h.  
Available with daylight/motion sensor and emergency unit – see pag 46-47




# Bollard 80 Flat **LED**

BOLLARD with post and flat lid in resin material Duralighting®; diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)




| CODE    | DESCRIPTION               | LAMP    | LED COLOR | LUMINOUS FLUX | CRI | VOLUME | COLOR |
|---------|---------------------------|---------|-----------|---------------|-----|--------|-------|
| DB.1277 | D.BOLLARD/80/FT/COR/LED/N | LED 18W | 4000K     | 2600lm        | 80  | 0,035  |       |
| DB.1279 | D.BOLLARD/80/FT/COR/LED/W | LED 18W | 3000K     | 2400lm        | 80  | 0,035  |       |
| DB.0710 | D.BOLLARD/80/FT/SLV/LED/N | LED 18W | 4000K     | 2600lm        | 80  | 0,035  |       |
| DB.1234 | D.BOLLARD/80/FT/SLV/LED/W | LED 18W | 3000K     | 2400lm        | 80  | 0,035  |       |
| DB.0687 | D.BOLLARD/80/FT/BLK/LED/N | LED 18W | 4000K     | 2600lm        | 80  | 0,035  |       |
| DB.1230 | D.BOLLARD/80/FT/BLK/LED/W | LED 18W | 3000K     | 2400lm        | 80  | 0,035  |       |

Module 42 LED - Remote Driver Included - Service life: 50.000 h.  
Available with daylight/motion sensor and emergency unit – see pag 46-47



4000K



3000K



IP65 CE U.V. RESISTANT IK10




# Bollard 105 Flat **LED**

BOLLARD with post and flat lid in resin material Duralighting® diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)




| CODE    | DESCRIPTION                | LAMP    | LED COLOR | LUMINOUS FLUX | CRI | VOLUME | COLO |
|---------|----------------------------|---------|-----------|---------------|-----|--------|------|
| DB.1278 | D.BOLLARD/105/FT/COR/LED/N | LED 18W | 4000K     | 2600lm        | 80  | 0,045  |      |
| DB.1315 | D.BOLLARD/105/FT/COR/LED/W | LED 18W | 3000K     | 2400lm        | 80  | 0,045  |      |
| DB.0716 | D.BOLLARD/105/FT/SLV/LED/N | LED 18W | 4000K     | 2600lm        | 80  | 0,045  |      |
| DB.1313 | D.BOLLARD/105/FT/SLV/LED/W | LED 18W | 3000K     | 2400lm        | 80  | 0,045  |      |
| DB.0688 | D.BOLLARD/105/FT/BLK/LED/N | LED 18W | 4000K     | 2600lm        | 80  | 0,045  |      |
| DB.1314 | D.BOLLARD/105/FT/BLK/LED/W | LED 18W | 3000K     | 2400lm        |     | 0,045  |      |

Module 42 LED - Remote Driver Included - Service life: 50.000 h.  
Available with daylight/motion sensor and emergency unit – see pag 46-47



4000K



3000K



IP65 CE U.V. RESISTANT IK10


# Bollard 50 Flat

BOLLARD with post and flat lid in resin material Duralighting®; diffuser in grooved transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)



| CODE    | DESCRIPTION         | LAMP          | VOLUME | COLOR |
|---------|---------------------|---------------|--------|-------|
| DB.0580 | D.BOLLARD/50/FT/BLK | E27 - MAX 60W | 0,025  | ■     |
| DB.0720 | D.BOLLARD/50/FT/SLV | E27 - MAX 60W | 0,025  | ■     |
| DB.1274 | D.BOLLARD/50/FT/COR | E27 - MAX 60W | 0,025  | ■     |

Available with daylight/motion sensor and emergency unit – see pag 46-47



IP65 CE U.V. RESISTANT IK10


# Bollard 80 Flat

BOLLARD with post and flat lid in resin material Duralighting®; diffuser in grooved transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)



| CODE    | DESCRIPTION         | LAMP          | VOLUME | COLOR |
|---------|---------------------|---------------|--------|-------|
| DB.0581 | D.BOLLARD/80/FT/BLK | E27 - MAX 60W | 0,035  | ■     |
| DB.0715 | D.BOLLARD/80/FT/SLV | E27 - MAX 60W | 0,035  | ■     |
| DB.1273 | D.BOLLARD/80/FT/COR | E27 - MAX 60W | 0,035  | ■     |

Available with daylight/motion sensor and emergency unit – see pag 46-47



IP65 CE U.V. RESISTANT IK10




# Bollard 105 Flat

BOLLARD with post and flat lid in resin material Duralighting®; diffuser in grooved transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)



| CODE    | DESCRIPTION          | LAMP          | VOLUME | COLOR |
|---------|----------------------|---------------|--------|-------|
| DB.0576 | D.BOLLARD/105/FT/BLK | E27 - MAX 60W | 0,045  | ■     |
| DB.0724 | D.BOLLARD/105/FT/SLV | E27 - MAX 60W | 0,045  | ■     |
| DB.1275 | D.BOLLARD/105/FT/COR | E27 - MAX 60W | 0,045  | ■     |

Available with daylight/motion sensor and emergency unit – see pag 46-47



IP65 CE U.V. RESISTANT IK10


# Bollard 50 Flat

BOLLARD with post and flat lid in resin material Duralighting®; diffuser in grooved transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)



| CODE    | DESCRIPTION         | LAMP          | VOLUME | COLOR   |
|---------|---------------------|---------------|--------|---|
| DB.1274 | D.BOLLARD/50/FT/COR | E27 - MAX 60W | 0,025  |  |
| DB.0720 | D.BOLLARD/50/FT/SLV | E27 - MAX 60W | 0,025  |  |
| DB.0580 | D.BOLLARD/50/FT/BLK | E27 - MAX 60W | 0,025  |  |

Available with daylight/motion sensor and emergency unit – see pag 46-47



IP65    U.V. RESISTANT IK10  


# Bollard 80 Flat

BOLLARD with post and flat lid in resin material Duralighting®; diffuser in grooved transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)



| CODE    | DESCRIPTION         | LAMP          | VOLUME | COLOR   |
|---------|---------------------|---------------|--------|---|
| DB.1273 | D.BOLLARD/80/FT/COR | E27 - MAX 60W | 0,035  |  |
| DB.0715 | D.BOLLARD/80/FT/SLV | E27 - MAX 60W | 0,035  |    |
| DB.0581 | D.BOLLARD/80/FT/BLK | E27 - MAX 60W | 0,035  |  |

Available with daylight/motion sensor and emergency unit – see pag 46-47



IP65  CE  U.V. RESISTANT  IK10  




# Bollard 105 Flat

BOLLARD with post and flat lid in resin material Duralighting®; diffuser in grooved transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)



| CODE    | DESCRIPTION          | LAMP          | VOLUME | COLOR   |
|---------|----------------------|---------------|--------|---|
| DB.1275 | D.BOLLARD/105/FT/COR | E27 - MAX 60W | 0,045  |  |
| DB.0724 | D.BOLLARD/105/FT/SLV | E27 - MAX 60W | 0,045  |  |
| DB.0576 | D.BOLLARD/105/FT/BLK | E27 - MAX 60W | 0,045  |  |

Available with daylight/motion sensor and emergency unit – see pag 46-47



IP65    U.V. RESISTANT IK10  


# Bollard 50 Round

BOLLARD with post and round lid in resin material  
Duralighting®; diffuser in grooved transparent or opal (OP)  
polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential  
area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)



| ODE     | DESCRIPTION         | LAMP          | VOLUME | COLOR |
|---------|---------------------|---------------|--------|-------|
| DB.0470 | D.BOLLARD/50/RD/BLK | E27 - MAX 60W | 0,025  | ■     |
| DB.1316 | D.BOLLARD/50/RD/COR | E27 - MAX 60W | 0,025  | ■     |
| DB.0719 | D.BOLLARD/50/RD/SLV | E27 - MAX 60W | 0,025  | ■     |

Available with daylight/motion sensor and emergency unit – see pag 46-47




# Bollard 80 Round

BOLLARD with post and round lid in resin material  
Duralighting®; diffuser in grooved transparent or opal (OP)  
polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential  
area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)



| CODE    | DESCRIPTION         | LAMP          | VOLUME | COLOR |
|---------|---------------------|---------------|--------|-------|
| DB.0471 | D.BOLLARD/80/RD/BLK | E27 - MAX 60W | 0,035  | ■     |
| DB.1317 | D.BOLLARD/80/RD/COR | E27 - MAX 60W | 0,035  | ■     |
| DB.0718 | D.BOLLARD/80/RD/SLV | E27 - MAX 60W | 0,035  | ■     |

Available with daylight/motion sensor and emergency unit – see pag 46-47




IP65 CE U.V. RESISTANT IK10

# Bollard 105 Round



Available Opal Diffuser (OP)




BOLLARD with post and round lid in resin material  
Duralighting®; diffuser in grooved transparent or opal (OP)  
polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential  
area, commercial area, public parking, square, park.

| CODE    | DESCRIPTION          | LAMP          | VOLUME | COLOR   |
|---------|----------------------|---------------|--------|---|
| DB.0472 | D.BOLLARD/105/RD/BLK | E27 - MAX 60W | 0,045  |  |
| DB.1318 | D.BOLLARD/105/RD/COR | E27 - MAX 60W | 0,045  |  |
| DB.0723 | D.BOLLARD/105/RD/SLV | E27 - MAX 60W | 0,045  |  |

Available with daylight/motion sensor and emergency unit – see pag 46-47




# Bollard 50 Round

BOLLARD with post and round lid in resin material  
Duralighting®; diffuser in grooved transparent or opal (OP)  
polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential  
area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)



| CODE    | DESCRIPTION         | LAMP          | VOLUME | COLOR   |
|---------|---------------------|---------------|--------|---|
| DB.1316 | D.BOLLARD/50/RD/COR | E27 - MAX 60W | 0,025  |  |
| DB.0470 | D.BOLLARD/50/RD/BLK | E27 - MAX 60W | 0,025  |  |
| DB.0719 | D.BOLLARD/50/RD/SLV | E27 - MAX 60W | 0,025  |  |

Available with daylight/motion sensor and emergency unit – see pag 46-47





9


# Bollard 80 Round

BOLLARD with post and round lid in resin material  
Duralighting®; diffuser in grooved transparent or opal (OP)  
polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential  
area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)



| CODE    | DESCRIPTION         | LAMP          | VOLUME | COLOR   |
|---------|---------------------|---------------|--------|---|
| DB.1317 | D.BOLLARD/80/RD/COR | E27 - MAX 60W | 0,035  |  |
| DB.0471 | D.BOLLARD/80/RD/BLK | E27 - MAX 60W | 0,035  |  |
| DB.0718 | D.BOLLARD/80/RD/SLV | E27 - MAX 60W | 0,035  |  |

Available with daylight/motion sensor and emergency unit – see pag 46-47



IP65  CE  U.V. RESISTANT  IK10  


# Bollard 105 Round

BOLLARD with post and round lid in resin material  
Duralighting®; diffuser in grooved transparent or opal (OP)  
polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential  
area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)



| CODE    | DESCRIPTION          | LAMP          | VOLUME | COLOR   |
|---------|----------------------|---------------|--------|---|
| DB.1318 | D.BOLLARD/105/RD/COR | E27 - MAX 60W | 0,045  |  |
| DB.0472 | D.BOLLARD/105/RD/BLK | E27 - MAX 60W | 0,045  |  |
| DB.0723 | D.BOLLARD/105/RD/SLV | E27 - MAX 60W | 0,045  |  |

Available with daylight/motion sensor and emergency unit – see pag 46-47




# Bollard 50 Cone

BOLLARD with post and conical lid in resin material  
Duralighting®; diffuser in grooved transparent or opal (OP)  
polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential  
area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)



| CODE    | DESCRIPTION         | LAMP          | VOLUME | COLOR |
|---------|---------------------|---------------|--------|-------|
| DB.0577 | D.BOLLARD/50/CN/BLK | E27 - MAX 60W | 0,025  | ■     |
| DB.0722 | D.BOLLARD/50/CN/SLV | E27 - MAX 60W | 0,025  | ■     |
| DB.1319 | D.BOLLARD/50/CN/COR | E27 - MAX 60W | 0,025  | ■     |

Available with daylight/motion sensor and emergency unit – see pag 46-47



IP65 CE U.V. RESISTANT IK10


# Bollard 80 Cone

BOLLARD with post and conical lid in resin material  
Duralighting®; diffuser in grooved transparent or opal (OP)  
polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential  
area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)



| CODE    | DESCRIPTION         | LAMP          | VOLUME | COLOR   |
|---------|---------------------|---------------|--------|---|
| DB.0578 | D.BOLLARD/80/CN/BLK | E27 - MAX 60W | 0,035  |  |
| DB.0721 | D.BOLLARD/80/CN/SLV | E27 - MAX 60W | 0,035  |  |
| DB.1320 | D.BOLLARD/80/CN/COR | E27 - MAX 60W | 0,035  |  |

Available with daylight/motion sensor and emergency unit – see pag 46-47



IP65  CE  U.V. RESISTANT  IK10  


# Bollard 105 Cone

BOLLARD with post and conical lid in resin material Duralighting®; diffuser in grooved transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, square, park.




Available Opal Diffuser (OP)

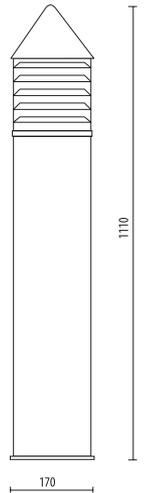

| CODE    | DESCRIPTION          | LAMP          | VOLUME | COLOR |
|---------|----------------------|---------------|--------|-------|
| DB.0579 | D.BOLLARD/105/CN/BLK | E27 - MAX 60W | 0,045  | ■     |
| DB.0725 | D.BOLLARD/105/CN/SLV | E27 - MAX 60W | 0,045  | ■     |
| DB.1321 | D.BOLLARD/105/CN/COR | E27 - MAX 60W | 0,045  | ■     |

Available with daylight/motion sensor and emergency unit – see pag 46-47




IP65 CE U.V. RESISTANT IK10

# Bollard 50 Half **LED**

BOLLARD with post and flat lid in resin material Duralighting®; diffuser in transparent polycarbonate UV stabilized.

Aluminium sheet fixed on the diffuser for frontal/180° light


Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, driveway.




| CODE    | DESCRIPTION                    | LAMP    | LED COLOR | LUMINOUS FLUX | CRI | VOLUME | COLOR |
|---------|--------------------------------|---------|-----------|---------------|-----|--------|-------|
| DB.1126 | D.BOLLARD/50/FT/BLK/LED/N-HALF | LED 18W | 4000K     | 2600lm        | 80  | 0,025  | ■     |
| DB.1323 | D.BOLLARD/50/FT/BLK/LED/W-HALF | LED 18W | 3000K     | 2400lm        | 80  | 0,025  | ■     |
| DB.1125 | D.BOLLARD/50/FT/SLV/LED/N-HALF | LED 18W | 4000K     | 2600lm        | 80  | 0,025  | ■     |
| DB.1324 | D.BOLLARD/50/FT/SLV/LED/W-HALF | LED 18W | 3000K     | 2400lm        | 80  | 0,025  | ■     |

Module 42 LED - Remote Driver Included - Service life: 50.000h.

Available with daylight/motion sensor and emergency unit – see pag 46-47



4000K



3000K




IP65 CE U.V. RESISTANT IK10

# Bollard 80 Half LED

BOLLARD with post and flat lid in resin material Duralighting®; diffuser in transparent polycarbonate UV stabilized.

Aluminium sheet fixed on the diffuser for frontal/180° light



Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, driveway.



| CODE    | DESCRIPTION                    | LAMP    | LED COLOR | LUMINOUS FLUX | CRI | VOLUME | COLOR |
|---------|--------------------------------|---------|-----------|---------------|-----|--------|-------|
| DB.1090 | D.BOLLARD/80/FT/BLK/LED/N-HALF | LED 18W | 4000K     | 2600lm        | 80  | 0,035  |       |
| DB.1283 | D.BOLLARD/80/FT/BLK/LED/W-HALF | LED 18W | 3000K     | 2400lm        | 80  | 0,035  |       |
| DB.1124 | D.BOLLARD/80/FT/SLV/LED/N-HALF | LED 18W | 4000K     | 2600lm        | 80  | 0,035  |       |
| DB.1322 | D.BOLLARD/80/FT/SLV/LED/W-HALF | LED 18W | 3000K     | 2400lm        | 80  | 0,035  |       |

Module 42 LED - Remote Driver Included - Service life: 50.000h.

Available with daylight/motion sensor and emergency unit – see pag 46-47

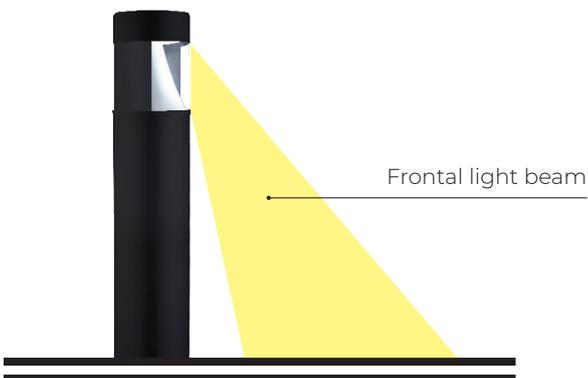

4000K



IP65 CE U.V. RESISTANT IK10


# Bollard 105 Half LED



BOLLARD with post and flat lid in resin material Duralighting®; diffuser in transparent polycarbonate UV stabilized.


Aluminium sheet fixed on the diffuser for frontal/180° light

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, driveway.




| CODE    | DESCRIPTION                     | LAMP    | LED COLOR | LUMINOUS FLUX | CRI | VOLUME | COLOR  |
|---------|---------------------------------|---------|-----------|---------------|-----|--------|--|
| DB.1076 | D.BOLLARD/105/FT/BLK/LED/N-HALF | LED 18W | 4000K     | 2600lm        | 80  | 0,045  | <span style="display: inline-block; width: 15px; height: 15px; background-color: black;"></span> |
| DB.1123 | D.BOLLARD/105/FT/BLK/LED/W-HALF | LED 18W | 3000K     | 2400lm        | 80  | 0,045  | <span style="display: inline-block; width: 15px; height: 15px; background-color: black;"></span> |
| DB.1284 | D.BOLLARD/105/FT/SLV/LED/N-HALF | LED 18W | 4000K     | 2600lm        | 80  | 0,045  | <span style="display: inline-block; width: 15px; height: 15px; background-color: gray;"></span>  |
| DB.1232 | D.BOLLARD/105/FT/SLV/LED/W-HALF | LED 18W | 3000K     | 2400lm        | 80  | 0,045  | <span style="display: inline-block; width: 15px; height: 15px; background-color: gray;"></span>  |

Module 42 LED - Remote Driver Included - Service life: 50.000h.  
Available with daylight/motion sensor and emergency unit – see pag 46-47



4000K



3000K




IP65 CE U.V. RESISTANT IK10

# Bollard 50 Half

BOLLARD with post and flat lid in resin material Duralighting®; diffuser in transparent polycarbonate UV stabilized.



Aluminium sheet fixed on the diffuser for frontal/180° light

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, driveway.



| CODE    | DESCRIPTION              | LAMP          | VOLUME (m³) | COLOR |
|---------|--------------------------|---------------|-------------|-------|
| DB.1164 | D.BOLLARD/50/FT/SLV-HALF | E27 - max 60W | 0,025       |       |
| DB.1163 | D.BOLLARD/50/FT/BLK-HALF | E27 - max 60W | 0,025       |       |

Available with daylight/motion sensor and emergency unit – see pag 46-47

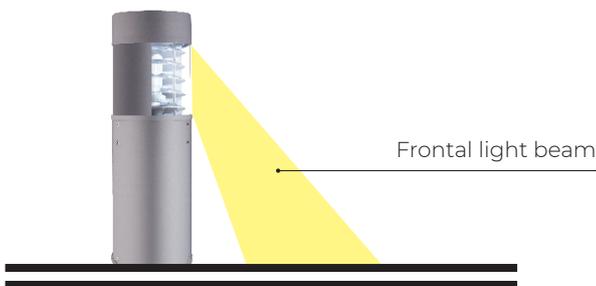

IP65 CE U.V. RESISTANT IK10


# Bollard 80 Half



BOLLARD with post and flat lid in resin material Duralighting®; diffuser in transparent polycarbonate UV stabilized.



Aluminium sheet fixed on the diffuser for frontal/180° light

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, driveway.



| CODE    | DESCRIPTION              | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|--------------------------|---------------|--------------------------|---|
| DB.1165 | D.BOLLARD/80/FT/SLV-HALF | E27 - max 60W | 0,035                    |  |
| DB.1139 | D.BOLLARD/80/FT/BLK-HALF | E27 - max 60W | 0,035                    |  |

Available with daylight/motion sensor and emergency unit – see pag 46-47

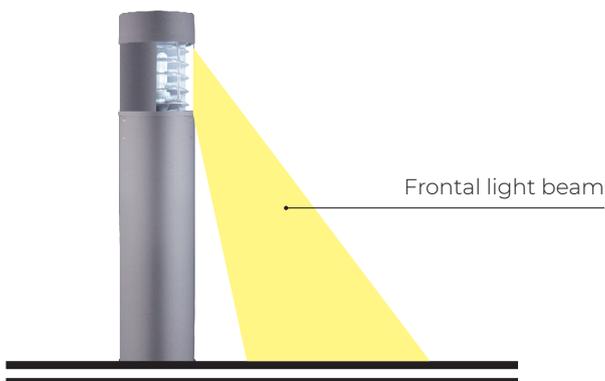


# Bollard 105 Half



BOLLARD with post and flat lid in resin material Duralighting®; diffuser in transparent polycarbonate UV stabilized.


Aluminium sheet fixed on the diffuser for frontal/180° light

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, public parking, driveway.



| CODE    | DESCRIPTION               | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|---------------------------|---------------|--------------------------|---|
| DB.1167 | D.BOLLARD/105/FT/SLV-HALF | E27 - max 60W | 0,045                    |  |
| DB.1166 | D.BOLLARD/105/FT/BLK-HALF | E27 - max 60W | 0,04                     |  |

Available with daylight/motion sensor and emergency unit – see pag 46-47



IP65  CE  U.V. RESISTANT  IK10  

# Bollard with motion sensor NEW


---

The BOLLARD range can be more efficient thanks to the integration of motion sensor for security lights in outdoor lighting.

The motion sensors, by detecting the passage of people, guarantees the right lighting during the night.

## **Motion sensor technical details:**

- Operating voltage: 220-240Vac, 50Hz
- HF system: 5.8GHz CW radar
- Transmitting power: <0,2 mW
- Power consumption: < 0,5W
- Detection zone: Max 12 mA in diameter adjustable
- Sensivity: 10% / 30% / 50% / 75%/ 100%
- Time setting: 5s/30 min.
- Light control: 2lux/50lux/disable
- Anti wireless interference

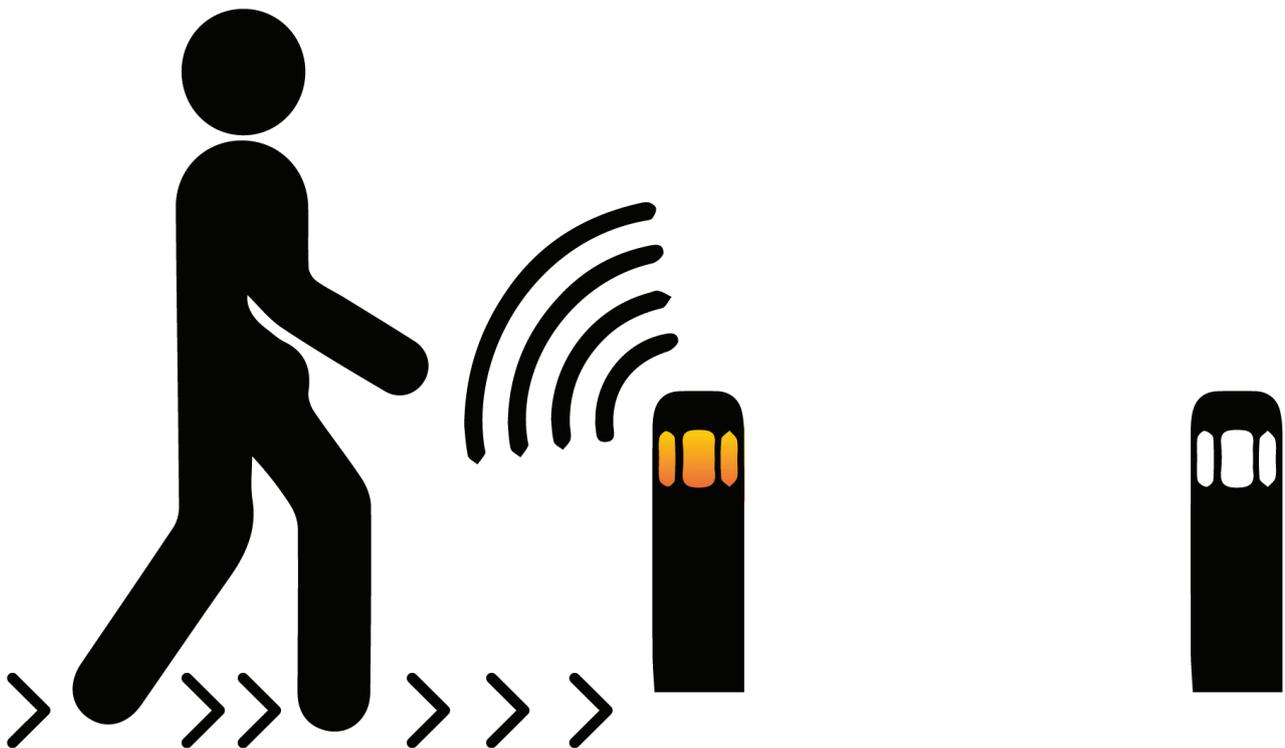


# Bollard with emergency kit **NEW**

The emergency kits are designed to intervene in case of electric blackout and it can replace automatically the light, transforming the BOLLARD fixture into an emergency fixture.

## Emergency light kit details:

- Intelligent automatic recharging function
- 3 hours emergency operation
- LED charge status display
- Test switch with self-test function
- Reated supply voltage: 220-240V
- Frequency: 50-60Hz
- Input corrent: 40mA
- Max casing temperature: 70 C°
- Recharge hours: 20h
- Ambient temperature: 5-45 C°
- Battery type Ni-Cd 3,6V 3Ah

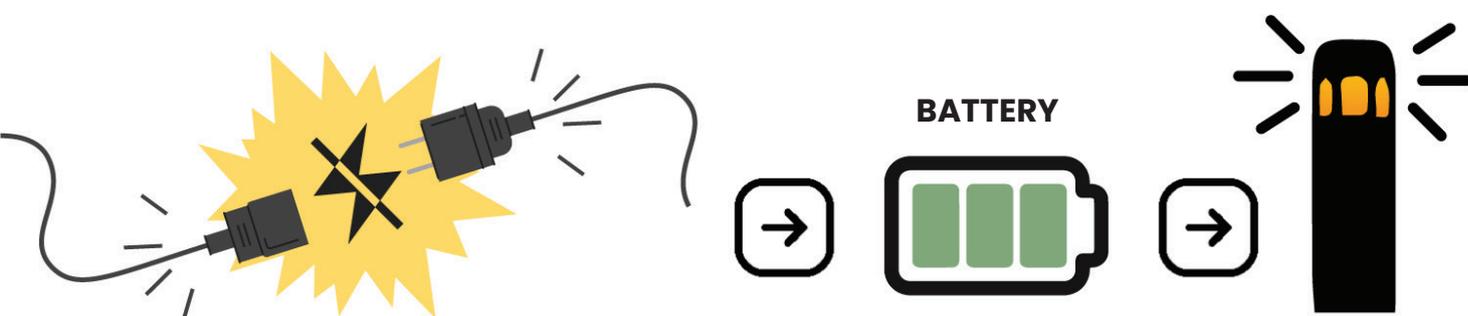



# Futura **LED**

Is the latest finding of DURALITE ranges. It has been studied to meet the market's demands for modern residential lighting. Its configuration on the wall or on the post with 1 or 2 lights in different heights is the best way to light up the private houses, villas, hotels, parks, gardens and residential areas.



FUTURA POP



FUTURA RAP



FUTURA ROCK



FUTURA SWING



FUTURA SOUL



FUTURA BLUES

## MATERIAL

**BODY** and **POST** in resin material **DURALIGHTING®**: a patented material studied to resist against UV-rays, corrosion and all weather agents. It can be used in any climatic areas especially in marine environments and tropical climates. The **DURALIGHTING®** is a strong and resistant material with a polished and smooth finish. **DIFFUSER** in opal polycarbonate UV stabilized.

## TECHNICAL DETAILS

**PROTECTION DEGREE:** IP65  
**ISOLATION CLASS:** II  
**COLOR:** black, silver  
**LAMP:** E27 / LED  
Stainless steel screws  
Aluminium reflector  
Silicon seal gasket  
Fixing kit included

## APPLICATIONS


- GARDEN
- BALCONY
- PORCH
- COURT
- WALKWAY
- COMMERCIAL AREA
- PARK

# Futura Pop




Light fitting with body in resin material Duralighting®, complete with base for installation on the wall; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, balcony, walkway, residential area, commercial area.



| CODE    | DESCRIPTION    | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|----------------|---------------|--------------------------|---|
| DB.0793 | FUTURA/POP/BLK | E27 - max 42W | 0,01                     |  |
| DB.0794 | FUTURA/POP/SLV | E27 - max 42W | 0,01                     |  |




# Futura Pop **LED**




Light fitting with body in resin material Duralighting®, complete with base for installation on the wall; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, balcony, walkway, residential area, commercial area.




| CODE    | DESCRIPTION          | LAMP    | LED COLOR | LUMINOUS FLUX | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|----------------------|---------|-----------|---------------|--------------------------|---|
| DB.0795 | FUTURA/POP/SLV/LED/N | LED 15W | 4000K     | 1600lm        | 0,01                     |  |
| DB.1007 | FUTURA/POP/SLV/LED/W | LED 15W | 2700K     | 1400lm        | 0,01                     |  |
| DB.0796 | FUTURA/POP/BLK/LED/N | LED 15W | 4000K     | 1600lm        | 0,01                     |  |
| DB.1006 | FUTURA/POP/BLK/LED/W | LED 15W | 2700K     | 1400lm        | 0.01                     |  |

Module 30 LED- Direct connection to 230V (driver not necessary) - Service life:50.000 h.



**4000K**




**2700K**

IP65    U.V. RESISTANT   

# Futura Rap

Light fitting with body in resin material Duralighting®, complete with base for installation on the wall; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, balcony, walkway, residential area, commercial area.




| CODE    | DESCRIPTION    | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|----------------|---------------|--------------------------|---|
| DB.0801 | FUTURA/RAP/BLK | E27 - max 42W | 0,01                     |  |
| DB.0803 | FUTURA/RAP/SLV | E27 - max 42W | 0,01                     |  |

# Futura Rap LED


Light fitting with body in resin material Duralighting®, complete with base for installation on the wall; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, balcony, walkway, residential area, commercial area.



| CODE    | DESCRIPTION          | LAMP    | LED COLOR | LUMINOUS FLUX | VOLUME (m³) | COLOR |
|---------|----------------------|---------|-----------|---------------|-------------|-------|
| DB.0790 | FUTURA/RAP/SLV/LED/N | LED 15W | 4000K     | 1600lm        | 0,01        | ■     |
| DB.1009 | FUTURA/RAP/SLV/LED/W | LED 15W | 2700K     | 1400lm        | 0,01        | ■     |
| DB.0800 | FUTURA/RAP/BLK/LED/N | LED 15W | 4000K     | 1600lm        | 0,01        | ■     |
| DB.1008 | FUTURA/RAP/BLK/LED/W | LED 15W | 2700K     | 1400lm        | 0,01        | ■     |

Module 30 LED- Direct connection to 230V (driver not necessary) - Service life:50.000 h.

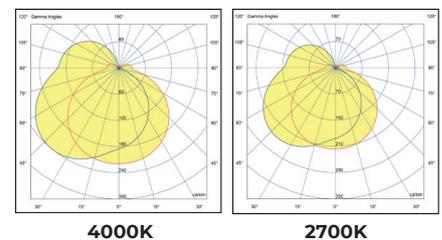


IP65 CE U.V. RESISTANT


# Futura Rock/60

Light fitting with body and post in resin material Duralighting® complete with base for installation on the ground; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.




| CODE    | DESCRIPTION        | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|--------------------|---------------|--------------------------|---|
| DB.0826 | FUTURA/ROCK/60/BLK | E27 - max 42W | 0,02                     |  |
| DB.0827 | FUTURA/ROCK/60/SLV | E27 - max 42W | 0,02                     |  |



# Futura Rock/60 LED


Light fitting with body and post in resin material Duralighting® complete with base for installation on the ground; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.




| CODE    | DESCRIPTION              | LAMP    | LED COLOR | LUMINOUS FLUX | VOLUME (m <sup>3</sup> ) | COLOR  |
|---------|--------------------------|---------|-----------|---------------|--------------------------|--|
| DB.0829 | FUTURA/ROCK/60/SLV/LED/N | LED 15W | 4000K     | 1600lm        | 0,02                     | <span style="display: inline-block; width: 15px; height: 15px; background-color: #808080;"></span> |
| DB.1011 | FUTURA/ROCK/60/SLV/LED/W | LED 15W | 2700K     | 1400lm        | 0,02                     | <span style="display: inline-block; width: 15px; height: 15px; background-color: #666666;"></span> |
| DB.0828 | FUTURA/ROCK/60/BLK/LED/N | LED 15W | 4000K     | 1600lm        | 0,02                     | <span style="display: inline-block; width: 15px; height: 15px; background-color: #1a1a1a;"></span> |
| DB.1010 | FUTURA/ROCK/60/BLK/LED/W | LED 15W | 2700K     | 1400lm        | 0,02                     | <span style="display: inline-block; width: 15px; height: 15px; background-color: #000000;"></span> |

Module 30 LED - Direct connection to 230V (driver not necessary) - Service life: 50.000 h.



**4000K**



**2700K**


IP65 U.V. RESISTANT




# Futura Rock/100

Light fitting with body and post in resin material Duralighting® complete with base for installation on the ground; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



| CODE    | DESCRIPTION         | LAMP          | VOLUME (m³) | COLOR   |
|---------|---------------------|---------------|-------------|---|
| DB.0830 | FUTURA/ROCK/100/BLK | E27 - max 42W | 0,03        |  |
| DB.0831 | FUTURA/ROCK/100/SLV | E27 - max 42W | 0,03        |  |




# Futura Rock/100 LED




Light fitting with body and post in resin material Duralighting® complete with base for installation on the ground; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.




| CODE    | DESCRIPTION               | LAMP    | LED COLOR | LUMINOUS FLUX | VOLUME (m <sup>3</sup> ) | COLOR |
|---------|---------------------------|---------|-----------|---------------|--------------------------|-------|
| DB.0833 | FUTURA/ROCK/100/SLV/LED/N | LED 15W | 4000K     | 1600lm        | 0,03                     |       |
| DB.1013 | FUTURA/ROCK/100/SLV/LED/W | LED 15W | 2700K     | 1400lm        | 0,03                     |       |
| DB.0832 | FUTURA/ROCK/100/BLK/LED/N | LED 15W | 4000K     | 1600lm        | 0,03                     |       |
| DB.1012 | FUTURA/ROCK/100/BLK/LED/W | LED 15W | 2700K     | 1400lm        | 0,03                     |       |

Module 30 LED - Direct connection to 230V (driver not necessary) - Service life: 50.000 h.



**4000K**




**2700K**

IP65 U.V. RESISTANT


# Futura Swing/100

Light fitting with body and post in resin material Duralighting® complete with base for installation on the ground; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



| CODE    | DESCRIPTION          | LAMP          | VOLUME (m³) | COLOR   |
|---------|----------------------|---------------|-------------|---|
| DB.0839 | FUTURA/SWING/100/BLK | E27 - max 42W | 0,05        |  |
| DB.0842 | FUTURA/SWING/100/SLV | E27 - max 42W | 0,05        |  |




# Futura Swing/100 **LED**




Light fitting with body and post in resin material Duralighting® complete with base for installation on the ground; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



| CODE    | DESCRIPTION                | LAMP    | LED COLOR | LUMINOUS FLUX | VOLUME (m³) | COLOR   |
|---------|----------------------------|---------|-----------|---------------|-------------|---|
| DB.0844 | FUTURA/SWING/100/SLV/LED/N | LED 15W | 4000K     | 1600lm        | 0,05        |  |
| DB.1019 | FUTURA/SWING/100/SLV/LED/W | LED 15W | 2700K     | 1400lm        | 0,05        |  |
| DB.0843 | FUTURA/SWING/100/BLK/LED/N | LED 15W | 4000K     | 1600lm        | 0,05        |  |
| DB.1018 | FUTURA/SWING/100/BLK/LED/W | LED 15W | 2700K     | 1400lm        | 0,05        |  |

Module 30 LED - Direct connection to 230V (driver not necessary) - Service life:50.000 h.

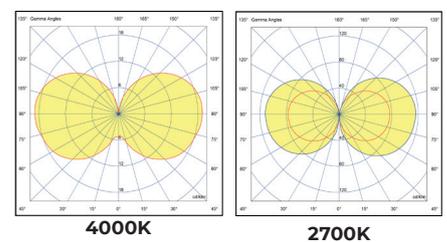


IP65    U.V. RESISTANT   


# Futura Funk/60

Light fitting with body and post in resin material Duralighting® complete with base for installation on the ground; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.




| CODE    | DESCRIPTION        | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|--------------------|---------------|--------------------------|---|
| DB.0834 | FUTURA/FUNK/60/BLK | E27 - max 42W | 0,04                     |  |
| DB.0835 | FUTURA/FUNK/60/SLV | E27 - max 42W | 0,04                     |  |



# Futura Funk/60 LED


Light fitting with body and post in resin material Duralighting® complete with base for installation on the ground; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



| CODE    | DESCRIPTION              | LAMP    | LED COLOR | LUMINOUS FLUX | VOLUME (m³) | COLOR  |
|---------|--------------------------|---------|-----------|---------------|-------------|--|
| DB.0819 | FUTURA/FUNK/60/SLV/LED/N | LED 15W | 4000K     | 1600lm        | 0,04        | <span style="display: inline-block; width: 15px; height: 15px; background-color: #808080;"></span> |
| DB.1015 | FUTURA/FUNK/60/SLV/LED/W | LED 15W | 2700K     | 1400lm        | 0,04        | <span style="display: inline-block; width: 15px; height: 15px; background-color: #808080;"></span> |
| DB.0837 | FUTURA/FUNK/60/BLK/LED/N | LED 15W | 4000K     | 1600lm        | 0,04        | <span style="display: inline-block; width: 15px; height: 15px; background-color: #000000;"></span> |
| DB.1014 | FUTURA/FUNK/60/BLK/LED/W | LED 15W | 2700K     | 1400lm        | 0,04        | <span style="display: inline-block; width: 15px; height: 15px; background-color: #000000;"></span> |

Module 30 LED - Direct connection to 230V (driver not necessary) - Service life: 50.000 h.

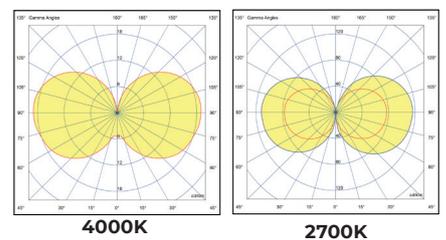


IP65 U.V. RESISTANT




# Futura Funk/100

Light fitting with body and post in resin material Duralighting® complete with base for installation on the ground; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



| CODE    | DESCRIPTION         | LAMP          | VOLUME (m³) | COLOR   |
|---------|---------------------|---------------|-------------|---|
| DB.0838 | FUTURA/FUNK/100/BLK | E27 - max 42W | 0,05        |  |
| DB.0836 | FUTURA/FUNK/100/SLV | E27 - max 42W | 0,05        |  |






# Futura Funk/100 LED


Light fitting with body and post in resin material Duralighting® complete with base for installation on the ground; diffuser in opal polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



| CODE    | DESCRIPTION               | LAMP    | LED COLOR | LUMINOUS FLUX | VOLUME (m³) | COLOR |
|---------|---------------------------|---------|-----------|---------------|-------------|-------|
| DB.0841 | FUTURA/FUNK/100/SLV/LED/N | LED 15W | 4000K     | 1600lm        | 0,05        |       |
| DB.1017 | FUTURA/FUNK/100/SLV/LED/W | LED 15W | 2700K     | 1400lm        | 0,05        |       |
| DB.0840 | FUTURA/FUNK/100/BLK/LED/N | LED 15W | 4000K     | 1600lm        | 0,05        |       |
| DB.1016 | FUTURA/FUNK/100/BLK/LED/W | LED 15W | 2700K     | 1400lm        | 0,05        |       |

Module 30 LED - Direct connection to 230V (driver not necessary) - Service life: 50.000 h.

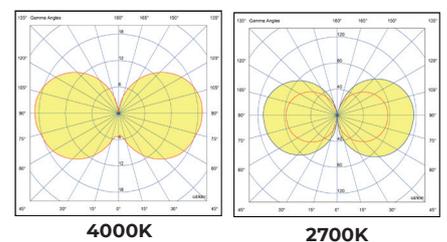



IP65 U.V. RESISTANT

# Futura Soul/60


Light fitting with body and post in resin material Duralighting®; diffuser in opal polycarbonate UV stabilized.

Without base: to fix in the ground with concrete plinth of cm 40x40x40.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



| CODE    | DESCRIPTION        | LAMP          | VOLUME (m³) | COLOR |
|---------|--------------------|---------------|-------------|-------|
| DB.0845 | FUTURA/SOUL/60/BLK | E27 - max 42W | 0,02        | ■     |
| DB.0846 | FUTURA/SOUL/60/SLV | E27 - max 42W | 0,02        | ■     |





# Futura Soul/60 LED

Light fitting with body and post in resin material Duralighting®; diffuser in opal polycarbonate UV stabilized.


Without base: to fix in the ground with concrete plinth of cm 40x40x40.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



| CODE    | DESCRIPTION              | LAMP    | LED COLOR | LUMINOUS FLUX | VOLUME (m <sup>3</sup> ) | COLOR |
|---------|--------------------------|---------|-----------|---------------|--------------------------|-------|
| DB.0848 | FUTURA/SOUL/60/SLV/LED/N | LED 15W | 4000K     | 1600lm        | 0,02                     |       |
| DB.1021 | FUTURA/SOUL/60/SLV/LED/W | LED 15W | 2700K     | 1400lm        | 0,02                     |       |
| DB.0847 | FUTURA/SOUL/60/BLK/LED/N | LED 15W | 4000K     | 1600lm        | 0,02                     |       |
| DB.1020 | FUTURA/SOUL/60/BLK/LED/W | LED 15W | 2700K     | 1400lm        | 0,02                     |       |

Module 30 LED - Direct connection to 230V (driver not necessary) - Service life: 50.000 h.



4000K

IP65 U.V. RESISTANT





# Futura Soul/100


Light fitting with body and post in resin material Duralighting®; diffuser in opal polycarbonate UV stabilized.

Without base: to fix in the ground with concrete plinth of cm 40x40x40.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



| CODE    | DESCRIPTION         | LAMP          | VOLUME (m³) | COLOR |
|---------|---------------------|---------------|-------------|-------|
| DB.0849 | FUTURA/SOUL/100/BLK | E27 - max 42W | 0,03        | ■     |
| DB.0850 | FUTURA/SOUL/100/SLV | E27 - max 42W | 0,03        | ■     |





# Futura Soul/100 LED



Light fitting with body and post in resin material Duralighting®; diffuser in opal polycarbonate UV stabilized.


Without base: to fix in the ground with concrete plinth of cm 40x40x40.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.




| CODE    | DESCRIPTION               | LAMP    | LED COLOR | LUMINOUS FLUX | VOLUME (m <sup>3</sup> ) | COLOR |
|---------|---------------------------|---------|-----------|---------------|--------------------------|-------|
| DB.0852 | FUTURA/SOUL/100/SLV/LED/N | LED 15W | 4000K     | 1600lm        | 0,03                     |       |
| DB.1023 | FUTURA/SOUL/100/SLV/LED/W | LED 15W | 2700K     | 1400lm        | 0,03                     |       |
| DB.0851 | FUTURA/SOUL/100/BLK/LED/N | LED 15W | 4000K     | 1600lm        | 0,03                     |       |
| DB.1022 | FUTURA/SOUL/100/BLK/LED/W | LED 15W | 2700K     | 1400lm        | 0,03                     |       |

Module 30 LED- Direct connection to 230V (driver not necessary) - Service life:50.000 h.



**4000K**



**2700K**

IP65 CE U.V. RESISTANT



# Futura Blues/100




Light fitting with body and post in resin material Duralighting®; diffuser in opal polycarbonate UV stabilized.

Without base: to fix in the ground with concrete plinth of cm 40x40x40.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



| CODE    | DESCRIPTION          | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR |
|---------|----------------------|---------------|--------------------------|-------|
| DB.0861 | FUTURA/BLUES/100/BLK | E27 - max 42W | 0,05                     | ■     |
| DB.0862 | FUTURA/BLUES/100/SLV | E27 - max 42W | 0,05                     | ■     |





# Futura Blues/100 **LED**



Light fitting with body and post in resin material Duralighting®; diffuser in opal polycarbonate UV stabilized.


Without base: to fix in the ground with concrete plinth of cm 40x40x40.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.




| CODE    | DESCRIPTION                | LAMP    | LED COLOR | LUMINOUS FLUX | VOLUME (m <sup>3</sup> ) | COLOR |
|---------|----------------------------|---------|-----------|---------------|--------------------------|-------|
| DB.0864 | FUTURA/BLUES/100/SLV/LED/N | LED 15W | 4000K     | 1600lm        | 0,05                     |       |
| DB.1029 | FUTURA/BLUES/100/SLV/LED/W | LED 15W | 2700K     | 1400lm        | 0,05                     |       |
| DB.0863 | FUTURA/BLUES/100/BLK/LED/N | LED 15W | 4000K     | 1600lm        | 0,05                     |       |
| DB.1028 | FUTURA/BLUES/100/BLK/LED/W | LED 15W | 2700K     | 1400lm        | 0,05                     |       |

Module 30 LED - Direct connection to 230V (driver not necessary) - Service life: 50.000 h.



4000K



2700K


IP65 CE U.V. RESISTANT

# Futura Jazz/60


Light fitting with body and post in resin material Duralighting®; diffuser in opal polycarbonate UV stabilized.

Without base: to fix in the ground with concrete plinth of cm 40x40x40.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.



| CODE    | DESCRIPTION        | LAMP          | VOLUME (m³) | COLOR |
|---------|--------------------|---------------|-------------|-------|
| DB.0853 | FUTURA/JAZZ/60/BLK | E27 - max 42W | 0,04        | ■     |
| DB.0854 | FUTURA/JAZZ/60/SLV | E27 - max 42W | 0,04        | ■     |





# Futura Jazz/60 LED

Light fitting with body and post in resin material Duralighting®; diffuser in opal polycarbonate UV stabilized.


Without base: to fix in the ground with concrete plinth of cm 40x40x40.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.




| CODE    | DESCRIPTION              | LAMP    | LED COLOR | LUMINOUS FLUX | VOLUME (m <sup>3</sup> ) | COLOR |
|---------|--------------------------|---------|-----------|---------------|--------------------------|-------|
| DB.0856 | FUTURA/JAZZ/60/SLV/LED/N | LED 15W | 4000K     | 1600lm        | 0,04                     | ■     |
| DB.1025 | FUTURA/JAZZ/60/SLV/LED/W | LED 15W | 2700K     | 1400lm        | 0,04                     | ■     |
| DB.0855 | FUTURA/JAZZ/60/BLK/LED/N | LED 15W | 4000K     | 1600lm        | 0,04                     | ■     |
| DB.1024 | FUTURA/JAZZ/60/BLK/LED/W | LED 15W | 2700K     | 1400lm        | 0,04                     | ■     |

Module 30 LED - Direct connection to 230V (driver not necessary) - Service life: 50.000 h.



**4000K**



**2700K**

IP65 CE U.V. RESISTANT




# Futura Jazz/100


Light fitting with body and post in resin material Duralighting®; diffuser in opal polycarbonate UV stabilized.

Without base: to fix in the ground with concrete plinth of cm 40x40x40.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.

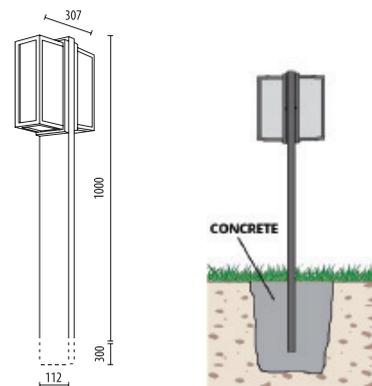

| CODE    | DESCRIPTION         | LAMP          | VOLUME (m³) | COLOR   |
|---------|---------------------|---------------|-------------|---|
| DB.0857 | FUTURA/JAZZ/100/BLK | E27 - max 42W | 0,05        |  |
| DB.0858 | FUTURA/JAZZ/100/SLV | E27 - max 42W | 0,05        |  |






# Futura Jazz/100 LED

Light fitting with body and post in resin material Duralighting®; diffuser in opal polycarbonate UV stabilized.


Without base: to fix in the ground with concrete plinth of cm 40x40x40.

Suitable for outdoor use: garden, court, walkway, residential area, commercial area, park, small square.

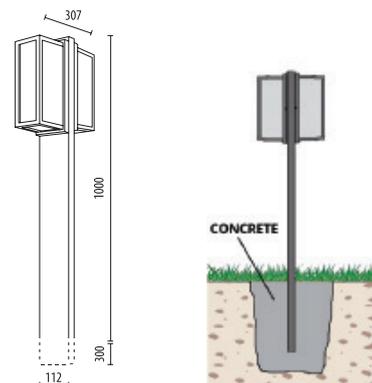

| CODE    | DESCRIPTION               | LAMP    | LED COLOR | LUMINOUS FLUX | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|---------------------------|---------|-----------|---------------|--------------------------|---|
| DB.0860 | FUTURA/JAZZ/100/SLV/LED/N | LED 15W | 4000K     | 1600lm        | 0,05                     |  |
| DB.1027 | FUTURA/JAZZ/100/SLV/LED/W | LED 15W | 2700K     | 1400lm        | 0,05                     |  |
| DB.0859 | FUTURA/JAZZ/100/BLK/LED/N | LED 15W | 4000K     | 1600lm        | 0,05                     |  |
| DB.1026 | FUTURA/JAZZ/100/BLK/LED/W | LED 15W | 2700K     | 1400lm        | 0,05                     |  |

Module 30 LED- Direct connection to 230V (driver not necessary) - Service life:50.000 h.

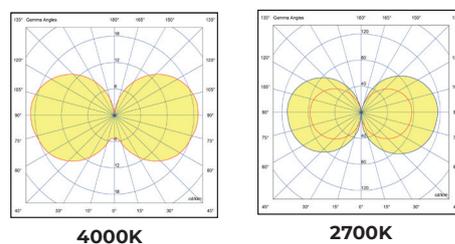

IP65    U.V. RESISTANT   



# Fresnel

With its linear design in the wall mounted version or in the post mounted version, the FRESNEL satisfy the different tastes of customers. In addition to the classical model with transparent diffuser, now the FRESNEL is available with opal diffuser that transforms an evergreen products in something of really modern.



FRESNEL 4008



FRESNEL 4009



FRESNEL 4010



FRESNEL 4011



FRESNEL 4012

## MATERIAL

POST in extruded aluminium with base and LID in resin material DURALIGHTING®: a patented material studied to resist against UV-rays, corrosion and all weather agents.

It can be used in any climatic areas especially in marine environments and tropical climates.

The DURALIGHTING® is a strong and resistant material with a polished and smooth finish.

DIFFUSER in transparent or opal polycarbonate UV stabilized.

## TECHNICAL DETAILS

PROTECTION DEGREE: IP44

ISOLATION CLASS: II

COLOR: black / silver

LAMP: E27

Stainless steel screws

Fixing kit TYPE F available on request

## APPLICATIONS

- GARDEN
- PORCH
- COURT
- WALKWAY
- COMMERCIAL AREA
- PUBLIC PARKING
- PARK


# Fresnel 4008

Light fitting with base and lid in resin material Duralighting®; post in extruded aluminium; diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, walkway, residential area, commercial area, public parking, park.



Available Opal Diffuser (OP)



| CODE    | DESCRIPTION         | LAMP          | VOLUME (m³)  | COLOR   |
|---------|---------------------|---------------|---|---|
| DB.0097 | FRESNEL 4008/BLK    | E27 - max 60W | 0,02  |  |
| DB.0869 | FRESNEL 4008/BLK/OP | E27 - max 60W | 0,02  |  |
| DB.0096 | FRESNEL 4008/SLV    | E27 - max 60W | 0,02  |  |
| DB.0866 | FRESNEL 4008/SLV/OP | E27 - max 60W | 0,02  |  |




# Fresnel 4009

Light fitting with base and lid in resin material Duralighting®; post in extruded aluminium; diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, walkway, residential area, commercial area, public parking, park.



Available Opal Diffuser (OP)



| CODE    | DESCRIPTION         | LAMP          | VOLUME (m³)  | ENERGY CLASS | COLOR   |
|---------|---------------------|---------------|---|--------------|---|
| DB.0162 | FRESNEL 4009/BLK    | E27 - max 60W | 0,025   |              |  |
| DB.0870 | FRESNEL 4009/BLK/OP | E27 - max 60W | 0,025   |              |  |
| DB.0411 | FRESNEL 4009/SLV    | E27 - max 60W | 0,025   |              |  |
| DB.0871 | FRESNEL 4009/SLV/OP | E27 - max 60W | 0,025   |              |  |



IP44    U.V. RESISTANT   




# Fresnel 4010

Light fitting with base and lid in resin material Duralighting®; post in extruded aluminium; diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, walkway, residential area, commercial area, public parking, park.



Available Opal Diffuser (OP)



| CODE    | DESCRIPTION         | LAMP          | VOLUME (m³)  | COLOR   |
|---------|---------------------|---------------|---|---|
| DB.0098 | FRESNEL 4010/BLK    | E27 - max 60W | 0,035   |  |
| DB.0874 | FRESNEL 4010/BLK/OP | E27 - max 60W | 0,035   |  |
| DB.0340 | FRESNEL 4010/SLV    | E27 - max 60W | 0,035   |  |
| DB.0875 | FRESNEL 4010/SLV/OP | E27 - max 60W | 0,035   |  |



IP44    U.V. RESISTANT   


# Fresnel 4011



Available Opal Diffuser (OP)

Light fitting with base and lid in resin material Duralighting®; post in extruded aluminium; diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, walkway, residential area, commercial area, public parking, park.



| CODE    | DESCRIPTION        | LAMP          | VOLUME (m³)  | COLOR   |
|---------|--------------------|---------------|---|---|
| DB.0213 | FRESNEL 4011/BLK   | E27 - max 60W | 0,04  |  |
| DB.0878 | FRESNEL 4011/BLKOP | E27 - max 60W | 0,04  |  |
| DB.0277 | FRESNEL 4011/SLV   | E27 - max 60W | 0,04  |  |
| DB.0879 | FRESNEL 4011/SLVOP | E27 - max 60W | 0,04  |  |




# Fresnel 4012

Light fitting with body in resin material Duralighting®; diffuser in transparent or opal (OP) polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, balcony.



Available Opal Diffuser (OP)




| CODE    | DESCRIPTION         | LAMP          | VOLUME (m³)  | COLOR   |
|---------|---------------------|---------------|---|---|
| DB.0017 | FRESNEL 4012/BLK    | E27 - max 60W | 0,015   |  |
| DB.0880 | FRESNEL 4012/BLK/OP | E27 - max 60W | 0,015   |  |
| DB.0095 | FRESNEL 4012/SLV    | E27 - max 60W | 0,015   |  |
| DB.0881 | FRESNEL 4012/SLV/OP | E27 - max 60W | 0,015   |  |

IP44  CE  U.V. RESISTANT   




# Minilite


The different shapes, dimensions and color of MINILITE make this range the hugest and most complete of DURALITE production. Thanks to their numerous applications and essential style, the MINILITE are the ideal solution for the private garden, court and small urban areas and walkways.




ML 06



ML 03



ML 04



6002



ML 01



ML07

## MATERIAL

BODY and POST in resin material DURALIGHTING®: a patented material studied to resist against UV-rays, corrosion and all weather agents. It can be used in any climatic areas especially in marine environments and tropical climates. The DURALIGHTING® is a strong and resistant material with a polished and smooth finish. DIFFUSER in polycarbonate UV stabilized.

## TECHNICAL DETAILS

PROTECTION DEGREE: IP44  
ISOLATION CLASS: II  
COLOR: bronze / silver  
LAMP: E27  
Silicon gasket  
Stainless steel screws

## APPLICATIONS



- GARDEN
- PORCH
- COURT
- WALKWAY
- PEDESTRIAN AREA

# Minilite ML 06/310

Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.



Fixing Minilite into the ground



Fixing Minilite into concrete (or masonry elements)


| CODE    | DESCRIPTION   | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|---------------|---------------|--------------------------|---|
| DB.1194 | ML 06/310/BR  | E27 - max 40W | 0,015                    |  |
| DB.1117 | ML 06/310/SLV | E27 - max 40W | 0,015                    |  |

# Minilite ML 06/510


Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.



Fixing Minilite into the ground



Fixing Minilite into concrete (or masonry elements)

| CODE    | DESCRIPTION   | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|---------------|---------------|--------------------------|---|
| DB.1196 | ML 06/510/BR  | E27 - max 40W | 0,015                    |  |
| DB.1116 | ML 06/510/SLV | E27 - max 40W | 0,015                    |  |





# Minilite ML 06/710


Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.



Fixing Minilite into the ground




Fixing Minilite into concrete (or masonry elements)

| CODE    | DESCRIPTION   | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|---------------|---------------|--------------------------|---|
| DB.1198 | ML 06/710/BR  | E27 - max 40W | 0,025                    |  |
| DB.1115 | ML 06/710/SLV | E27 - max 40W | 0,025                    |  |

# Minilite ML 06/MT

Spotlight with body in resin material Duralighting® complete with base for installation on the wall; diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, balcony, residential area.



| CODE    | DESCRIPTION  | LAMP          | VOLUME (m³) | COLOR   |
|---------|--------------|---------------|-------------|---|
| DB.1200 | ML 06/MT/BR  | E27 - max 40W | 0,008       |  |
| DB.1121 | ML 06/MT/SLV | E27 - max 40W | 0,008       |  |


IP44    U.V. RESISTANT   

# Minilite ML 03/310

Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.



Fixing Minilite into the ground



Fixing Minilite into concrete (or masonry elements)


| CODE    | DESCRIPTION   | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|---------------|---------------|--------------------------|---|
| DB.0008 | ML 03/310/BR  | E27 - max 40W | 0,015                    |  |
| DB.0076 | ML 03/310/SLV | E27 - max 40W | 0,015                    |  |

# Minilite ML 03/510


Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.



Fixing Minilite into the ground



Fixing Minilite into concrete (or masonry elements)

| CODE    | DESCRIPTION   | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|---------------|---------------|--------------------------|---|
| DB.0009 | ML 03/510/BR  | E27 - max 40W | 0,015                    |  |
| DB.0077 | ML 03/510/SLV | E27 - max 40W | 0,015                    |  |

IP44    U.V. RESISTANT   




# Minilite ML 03/710

Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.

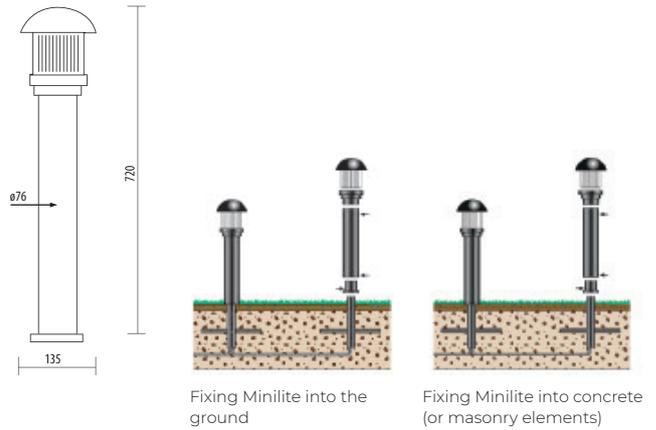

Fixing Minilite into the ground


Fixing Minilite into concrete (or masonry elements)

| CODE    | DESCRIPTION   | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|---------------|---------------|--------------------------|---|
| DB.0010 | ML03/710/BR   | E27 - max 40W | 0,025                    |  |
| DB.0078 | ML 03/710/SLV | E27 - max 40W | 0,025                    |  |

# Minilite ML 03/MT

Spotlight with body in resin material Duralighting® complete with base for installation on the wall; diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, balcony, residential area.



| CODE    | DESCRIPTION  | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|--------------|---------------|--------------------------|---|
| DB.0056 | ML 03/MT/BR  | E27 - max 40W | 0,008                    |  |
| DB.0057 | ML 03/MT/SLV | E27 - max 40W | 0,008                    |  |





# Minilite ML 04/310

Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included.

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.



Fixing Minilite into the ground



Fixing Minilite into concrete (or masonry elements)



| CODE    | DESCRIPTION   | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|---------------|---------------|--------------------------|---|
| DB.0002 | ML 04/310/BR  | E27 - max 40W | 0,015                    |  |
| DB.0267 | ML 04/310/SLV | E27 - max 40W | 0,015                    |  |

# Minilite ML 04/510

Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included.

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.



Fixing Minilite into the ground



Fixing Minilite into concrete (or masonry elements)

| CODE    | DESCRIPTION   | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|---------------|---------------|--------------------------|---|
| DB.0003 | ML 04/510/BR  | E27 - max 40W | 0,015                    |  |
| DB.0414 | ML 04/510/SLV | E27 - max 40W | 0,015                    |  |



# Minilite ML 04/710



Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included.

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.



Fixing Minilite into the ground



Fixing Minilite into concrete (or masonry elements)

| CODE    | DESCRIPTION   | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|---------------|---------------|--------------------------|---|
| DB.0004 | ML 04/710/BR  | E27 - max 40W | 0,025                    |  |
| DB.0415 | ML 04/710/SLV | E27 - max 40W | 0,025                    |  |

IP44    U.V. RESISTANT  




# Minilite ML 04/MT



Spotlight with body in resin material Duralighting® complete with base for installation on the wall; diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, balcony, residential area.



| CODE    | DESCRIPTION  | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|--------------|---------------|--------------------------|---|
| DB.0059 | ML 04/MT/BR  | E27 - max 40W | 0,008                    |  |
| DB.0058 | ML 04/MT/SLV | E27 - max 40W | 0,008                    |  |



IP44    U.V. RESISTANT   

# Minilite 6002/310

Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included.

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.



Fixing Minilite into the ground



Fixing Minilite into concrete (or masonry elements)



| CODE    | DESCRIPTION  | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|--------------|---------------|--------------------------|---|
| DB.0039 | 6002/310/BR  | E27 - max 40W | 0,015                    |  |
| DB.0042 | 6002/310/SLV | E27 - max 40W | 0,015                    |  |

# Minilite 6002/510

Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included.

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.



Fixing Minilite into the ground



Fixing Minilite into concrete (or masonry elements)

| CODE    | DESCRIPTION  | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|--------------|---------------|--------------------------|---|
| DB.0040 | 6002/510/BR  | E27 - max 40W | 0,015                    |  |
| DB.0043 | 6002/510/SLV | E27 - max 40W | 0,015                    |  |

IP44    U.V. RESISTANT   



# Minilite 6002/710



Spotlight with body and post in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Fixing kit included.

Suitable for outdoor use: private garden, court, porch, walkway, residential area, park.



Fixing Minilite into the ground




Fixing Minilite into concrete (or masonry elements)

| CODE    | DESCRIPTION  | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR |
|---------|--------------|---------------|--------------------------|-------|
| DB.0041 | 6002/710/BR  | E27 - max 40W | 0,025                    |       |
| DB.0044 | 6002/710/SLV | E27 - max 40W | 0,025                    |       |

# Minilite 6002/B

Spotlight with body and base in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, smal pillar, residential area.



| CODE    | DESCRIPTION | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR |
|---------|-------------|---------------|--------------------------|-------|
| DB.0223 | 6002/B/BLK  | E27 - max 40W | 0,015                    | ■     |
| DB.0133 | 6002/B/BR   | E27 - max 40W | 0,015                    | ■     |
| DB.0965 | 6002/B/SLV  | E27 - max 40W | 0,015                    | ■     |


IP44    U.V. RESISTANT   

# Minilite 6002/ML



Spotlight with body and arm in resin material Duralighting® complete with base for installation on the wall; diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, porch, small pillar, residential area.




| CODE    | DESCRIPTION | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|-------------|---------------|--------------------------|---|
| DB.0273 | 6002/ML/BLK | E27 - max 40W | 0,02                     |  |
| DB.0099 | 6002/ML/BR  | E27 - max 40W | 0,02                     |  |
| DB.0463 | 6002/ML/SLV | E27 - max 40W | 0,02                     |  |

# Minilite 6002/P



Spotlight with body and spike in resin material Duralighting®; diffuser in polycarbonate UV stabilized; rubber cable with schuko plug.

Suitable for outdoor use: garden, residential area, park, flowerbed.




| CODE    | DESCRIPTION | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR |
|---------|-------------|---------------|--------------------------|-------|
| DB.0011 | 6002/P/BLK  | E27 - max 40W | 0,02                     | ■     |

IP44    U.V. RESISTANT   

# Minilite ML 01

Spotlight with body in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: private garden, court, porch, balcony, small pillar.




| CODE    | DESCRIPTION | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|-------------|---------------|--------------------------|---|
| DB.0022 | ML 01/BR    | E14 - max 40W | 0,008                    |  |
| DB.0412 | ML 01/SLV   | E14 - max 40W | 0,008                    |  |

# Minilite ML 07

Spotlight with body in resin material Duralighting®; diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: private garden, court, porch, balcony.



| CODE    | DESCRIPTION | LAMP          | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|-------------|---------------|--------------------------|---|
| DB.0007 | ML 07/BR    | E14 - max 40W | 0,002                    |  |
| DB.0413 | ML 07/SLV   | E14 - max 40W | 0,002                    |  |

IP44    U.V. RESISTANT   



# Par

Adjustable floodlights with 1 or 2 lights to be fixed in the ground with spike or to be mounted on the wall. With their uniform and large beam of light, the PAR were studied to create a pleasant light effect in the green areas like private gardens, parks and flowerbeds and to bring out all details.



PAR 38 1/P



PAR 38 1/M



PAR 20 1/P



PAR 20 1/M



PAR PL/M



PAR PRESA

## MATERIAL

**BODY** in resin material DURALIGHTING®: a patented material studied to resist against UV-rays, corrosion and all weather agents. It can be used in any climatic areas especially in marine environments and tropical climates. The DURALIGHTING® is a strong and resistant material with a polished and smooth finish. **DIFFUSER**, if present, in polycarbonate UV stabilized.

## TECHNICAL DETAILS

**PROTECTION DEGREE:** IP55  
**ISOLATION CLASS:** II  
**COLOR:** black / bronze  
Silicon gasket  
Stainless steel screws  
Rubber cable of 2,50 m with schuko plug in spike version

## APPLICATIONS


- GARDEN
- WALKWAY
- COURT
- PARK
- PEDESTRIAN AREA

# Par 38 1/P



Spotlight single light with body and spike in resin material  
Duralighting®; rubber cable with schuko plug.

Suitable for outdoor use: garden, flowerbed, residential area,  
commercial area, park.




| CODE    | DESCRIPTION    | LAMP                 | VOLUME<br>(Single Box) | VOLUME<br>(Multiple Box) | COLOR |
|---------|----------------|----------------------|------------------------|--------------------------|-------|
| DB.0012 | PAR 38 1/P/BLK | E27 - PAR38 max 100W | 0,006                  | 0,05 (15 pcs)            | ■     |

# Par 38 1/M

Spotlight single lights with body in resin material Duralighting® complete with base for installation on the wall.

Suitable for outdoor use: garden, court, balcony, porch, residential area.



| CODE    | DESCRIPTION    | LAMP                 | VOLUME<br>(Single Box) | VOLUME<br>(Multiple Box) | COLOR |
|---------|----------------|----------------------|------------------------|--------------------------|-------|
| DB.0049 | PAR 38 1/M/BLK | E27 - PAR38 max 100W | 0,0025                 | 0,05 (20 pcs)            | ■     |


IP55    U.V.  
RESISTANT   



# Par 38 2/P

Spotlight two lights with body and spike in resin material  
Duralighting®; rubber cable with schuko plug.

Suitable for outdoor use: garden, flowerbed, residential area,  
commercial area, park.



| CODE    | DESCRIPTION    | LAMP                 | VOLUME<br>(Single Box) | VOLUME<br>(Multiple Box) | COLOR |
|---------|----------------|----------------------|------------------------|--------------------------|-------|
| DB.0034 | PAR 38 2/P/BLK | E27 - PAR38 max 100W | 0,0075                 | 0,05 (8 pcs)             | ■     |


IP55    U.V.  
RESISTANT   



# Par 38 2/M

Spotlight two lights with body in resin material Duralighting® complete with base for installation on the wall.

Suitable for outdoor use: garden, court, balcony, porch, residential area.



| CODE    | DESCRIPTION    | LAMP                | VOLUME<br>(Single Box) | VOLUME<br>(Multiple Box) | COLOR |
|---------|----------------|---------------------|------------------------|--------------------------|-------|
| DB.0190 | PAR 38 2/M/BLK | E27 - PAR38 max 50W | 0,005                  | 0,05 (10 pcs)            | ■     |


IP55    U.V.  
RESISTANT   

# Par 20 1/P



Spotlight single light with body and spike in resin material Duralighting®; rubber cable with schuko plug.

Suitable for outdoor use: garden, flowerbed, residential area, commercial area, park.




| CODE    | DESCRIPTION    | LAMP                | VOLUME<br>(Single Box) | VOLUME<br>(Multiple Box) | COLOR |
|---------|----------------|---------------------|------------------------|--------------------------|-------|
| DB.0032 | PAR 20 1/P/BLK | E27 - PAR20 max 50W | 0,006                  | 0,05 (10 pcs)            | ■     |

# Par 20 1/M

Spotlight single light with body in resin material  
Duralighting® complete with base for installation on the wall.

Suitable for outdoor use: garden, court, balcony, porch,  
residential area.




| CODE    | DESCRIPTION    | LAMP                | VOLUME<br>(Single Box) | VOLUME<br>(Multiple Box) | COLOR |
|---------|----------------|---------------------|------------------------|--------------------------|-------|
| DB.0048 | PAR 20 1/M/BLK | E27 - PAR20 max 50W | 0,0025                 | 0,05 (20 pcs)            | ■     |

# Par 20 2/P



Spotlight two lights with body and spike in resin material  
Duralighting®; rubber cable with schuko plug.

Suitable for outdoor use: garden, flowerbed, residential area,  
commercial area, park.




| CODE    | DESCRIPTION    | LAMP                | VOLUME<br>(Single Box) | VOLUME<br>(Multiple Box) | COLOR |
|---------|----------------|---------------------|------------------------|--------------------------|-------|
| DB.0033 | PAR 20 2/P/BLK | E27 - PAR20 max 50W | 0,0075                 | 0,05 (8 pcs)             | ■     |

# Par 20 2/M

Spotlight two lights with body in resin material Duralighting®; complete with base for installation on the wall.

Suitable for outdoor use: garden, court, balcony, porch, residential area.



| CODE    | DESCRIPTION    | LAMP                | VOLUME<br>(Single Box) | VOLUME<br>(Multiple Box) | COLOR |
|---------|----------------|---------------------|------------------------|--------------------------|-------|
| DB.0454 | PAR 20 2/M/BLK | E27 - PAR20 max 50W | 0,005                  | 0,05 (10 pcs)            | ■     |


IP55    U.V.  
RESISTANT   

# Par 20 R 1/P



Spotlight single light with body and spike in resin material  
Duralighting®; rubber cable with schuko plug.

Suitable for outdoor use: garden, flowerbed, residential area,  
commercial area, park.




| CODE    | DESCRIPTION      | LAMP                | VOLUME<br>(Single Box) | VOLUME<br>(Multiple Box) | COLOR |
|---------|------------------|---------------------|------------------------|--------------------------|-------|
| DB.0024 | PAR 20 R 1/P/BLK | E27 - PAR20 max 50W | 0,006                  | 0,05 (15 pcs)            | ■     |

# Par 20 R 1/M

Spotlight single light with body in resin material Duralighting® complete with base for installation on the wall.

Suitable for outdoor use: garden, court, balcony, porch, residential area.



| CODE    | DESCRIPTION      | LAMP                | VOLUME<br>(Single Box) | VOLUME<br>(Multiple Box) | COLOR |
|---------|------------------|---------------------|------------------------|--------------------------|-------|
| DB.0025 | PAR 20 R 1/M/BLK | E27 - PAR20 max 50W | 0,0025                 | 0,05 (20 pcs)            | ■     |
| DB.0275 | PAR 20 R 1/M/BR  | E27 - PAR20 max 50W | 0,0025                 | 0,05 (20 pcs)            | ■     |


IP55    U.V.  
RESISTANT   



# Par 20 R/310

Spotlight with body and post in resin material Duralighting®.  
Fixing kit included

Suitable for outdoor use: private garden, court, porch,  
walkway, residential area, park.

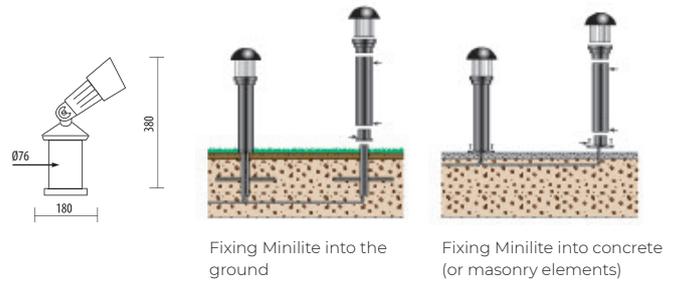

Fixing Minilite into the ground

Fixing Minilite into concrete (or masonry elements)



| CODE    | DESCRIPTION     | LAMP                | VOLUME<br>(Single Box) | COLOR   |
|---------|-----------------|---------------------|------------------------|---|
| DB.0416 | PAR 20 R/310/BR | E27 - PAR20 max 50W | 0,015                  |  |

IP55    U.V.  
RESISTANT  

# Par 20 R/510

Spotlight with body and post in resin material Duralighting®.  
Fixing kit included.

Suitable for outdoor use: private garden, court, porch,  
walkway, residential area, park.



Fixing Minilite into the ground



Fixing Minilite into concrete (or masonry elements)



| CODE    | DESCRIPTION     | LAMP                | VOLUME<br>(Single Box) | COLOR   |
|---------|-----------------|---------------------|------------------------|---|
| DB.0274 | PAR 20 R/510/BR | E27 - PAR20 max 50W | 0,015                  |  |

# Par 20 R/710



Spotlight with body and post in resin material Duralighting®.  
Fixing kit included.

Suitable for outdoor use: private garden, court, porch,  
walkway, residential area, park.



Fixing Minilite into the ground



Fixing Minilite into concrete (or masonry elements)

| CODE    | DESCRIPTION     | LAMP                | VOLUME<br>(Single Box) | COLOR   |
|---------|-----------------|---------------------|------------------------|---|
| DB.0417 | PAR 20 R/710/BR | E27 - PAR20 max 50W | 0,025                  |  |

IP55    U.V.  
RESISTANT   




# Par PL/M



Spotlight single light with body in resin material Duralighting® complete with base for installation on the wall.  
Diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: garden, court, balcony, porch, residential area.



| CODE    | DESCRIPTION  | LAMP              | VOLUME<br>(Single Box) | VOLUME<br>(Multiple Box) | COLOR |
|---------|--------------|-------------------|------------------------|--------------------------|-------|
| DB.0245 | PAR PL/M/BLK | E27 - CFL max 15W | 0,005                  | 0,05 (8 pcs)             | ■     |


IP55    U.V.  
RESISTANT   

# Par PL/P



Spotlight single light with body and spike in resin material  
Duralighting®; rubber cable with schuko plug.  
Diffuser in polycarbonate UV stabilized.

Suitable for outdoor use: garden, flowerbed, residential area,  
commercial area, park.




| CODE    | DESCRIPTION  | LAMP              | VOLUME<br>(Single Box) | VOLUME<br>(Multiple Box) | COLOR |
|---------|--------------|-------------------|------------------------|--------------------------|-------|
| DB.0083 | PAR PL/P/BLK | E27 - CFL max 15W | 0,01                   | 0,05 (5 pcs)             | ■     |

# Par Presa



Double shuko socket mounted on spike with body in resin material Duralighting®; rubber cable with shuko plug.

Suitable for outdoor use: garden, flowerbed, residential area, commercial area, park.



| CODE    | DESCRIPTION   | VOLUME<br>(Single Box) | VOLUME<br>(Multiple Box) | COLOR |
|---------|---------------|------------------------|--------------------------|-------|
| DB.0023 | PAR PRESA/BLK | 0,005                  | 0,035 (10 pcs)           | ■     |

IP55    U.V.  
RESISTANT   



# Clio

In round version and in two sizes, CLIO is a classic for light up the wall. Its simple and practical design meets different application requirements. It is especially suitable for garden, court, walkway, porch, residential area, commercial area. Furthermore, the thermoplastic material and the high IP protection ensure extreme strength and an excellent aesthetic effect.



CLIO/280



CLIO/390

## MATERIAL

Body and frame in polycarbonate UV stabilized;  
diffuser in transparent opal acrylic.

## TECHNICAL DETAILS

PROTECTION DEGREE: IP65  
ISOLATION CLASS: II  
COLOR: black / silver / white  
LAMP: E27  
Aluminium reflector  
Stainless steel screws

## APPLICATIONS


- GARDEN
- COURT
- WALKWAY
- PORCH
- RESIDENTIAL AREA
- COMMERCIAL AREA
- PUBLIC PARKING

# Clio 280

Round applique diam. 280 for wall or ceiling fixing with body and frame in polycarbonate UV stabilized; diffuser in opal acrylic.

Aluminium reflector.

Suitable for outdoor use: garden, court, walkway, porch, residential area, commercial area, public parking.



| CODE    | DESCRIPTION     | LAMP              | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|-----------------|-------------------|--------------------------|---|
| DB.0997 | CLIO/280/SLV/OP | E27 - CFL max 18W | 0,02                     |  |
| DB.0998 | CLIO/280/BLK/OP | E27 - CFL max 18W | 0,02                     |  |
| DB.0996 | CLIO/280/WHT/OP | E27 - CFL max 18W | 0,02                     |  |



BLACK




WHITE

# Clio 390



Round applique diam. 390 for wall or ceiling fixing with body and frame in polycarbonate UV stabilized; diffuser in opal acrylic.  
Aluminium reflector.

Suitable for outdoor use: garden, court, walkway, porch, residential area, commercial area, public parking.



| CODE    | DESCRIPTION     | LAMP              | VOLUME (m <sup>3</sup> ) | COLOR   |
|---------|-----------------|-------------------|--------------------------|---|
| DB.1003 | CLIO/390/SLV/OP | E27 - CFL max 21W | 0,035                    |  |
| DB.1004 | CLIO/390/BLK/OP | E27 - CFL max 21W | 0,035                    |  |
| DB.1002 | CLIO/390/WHT/OP | E27 - CFL max 21W | 0,035                    |  |



BLACK



WHITE

IP65    U.V. RESISTANT   



# The Classic with led

LED

The union between the classic style and the modern LED technology has given rise to THE CLASSIC WITH LED: a wide range of classic lanterns with bright and uniform light in different shapes and configurations available for installation on wall, ground or ceiling.

The long life and resistance of DURALIGHTING material along with the high technology offered by the LED, give the customer the warranty of high quality product for lighting up residential areas and hotels with traditional and elegant style.



D.50-MILANO

## MATERIAL

LANTERN in resin material DURALIGHTING®: a patented material studied to resist against UV-rays, corrosion and all weather agents. It can be used in any climatic areas especially in marine environments and tropical climates. The DURALIGHTING® is a strong and resistant material with a polished and smooth finish. DIFFUSER in polycarbonate UV stabilized.

## TECHNICAL DETAILS

PROTECTION DEGREE: IP55  
ISOLATION CLASS: II  
COLOR: black  
hand shaded color: black-rust, black-green, black-gold, black-silver  
LAMP: LED  
Stainless steel screws

## APPLICATIONS



- GARDEN
- COURT
- PORCH
- BALCONY
- RESIDENTIAL AREA



# The Classic with LED

## D.50-MILANO **LED**

Light fitting with lantern in resin material Duralighting®; resin material post reinforced with an internal galvanized steel pipe and polyurethane foam core adapted to guarantee a strong resistance to wind pressure; diffuser in polycarbonate UV stabilized.

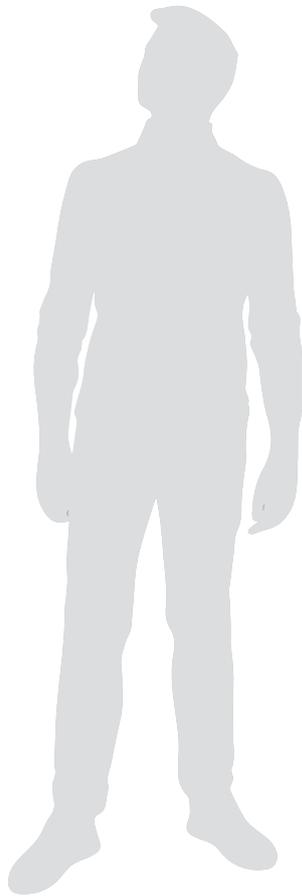

| CODE    | DESCRIPTION                 | LAMP    | LED COLOR | LUMINOUS FLUX | CRI | VOLUME | COLOR |
|---------|-----------------------------|---------|-----------|---------------|-----|--------|-------|
| DB.1282 | D.50-MILANO/DP211/1/BLK/LED | LED 25W | 4000K     | 2500lm        | 90  | 0,30   | ■     |

Please check all details in CLASSIC CATALOGUE

IP55 CE U.V. RESISTANT

# Technical Information

---

## Symbols



Product in compliance with European Union health, safety and environmental protection directive and regulations.



Fixture suitable for installation on normally inflammable surfaces.

U.V.  
RESISTANT

UV-stabilized material.  
Anti-yellowing.



Made in material which is resistant to vandalism acts.



Range of temperature between -50 and +80 degrees.



Fixture in recycling material.

## Insulation Class



CLASS I

Fixture equipped with primary insulation only.  
The safety of the product is guaranteed by an additional protective conductor for earth.



CLASS II

Product with double or reinforced insulation without earth devices.



CLASS III

Product suitable for very low voltage.

## Protection Degree IP

Degree of protection against penetration of solid (first number) and liquid (second number)

IP23

Protected against penetration of solid bodies  $\varnothing \geq 12$  mm and protected against rain.

IP44

Protected against penetration of solid bodies  $\varnothing \geq 1$  mm and against water sprays.

IP65

Sealed against penetration of dust and protected against water jets.

IP40

Protected against penetration of solid bodies  $\varnothing \geq 1$  mm.

IP54

Protected against penetration of dust and against water sprays.

IP67

Sealed against penetration of dust and protected against extensive quantity of water.


IP43

Protected against penetration of solid bodies  $\varnothing \geq 1$  mm and against rain.

IP55

Protected against penetration of dust and against water jets.

## Colors



BLACK (BLK)



BRONZE (BR)



CORTEN (COR)



SILVER (SLV)

# General Sale Conditions

---

- All prices are ex-works, unless otherwise agreed above.
- The order will be accepted after a written confirmation of the proforma invoice.
- The cancellation of order can be accepted only within 24 hours from the confirmation of proforma invoice.
- Transport or delivery by any means are at buyer's own risk.  
The company will not be liable for any damages after goods delivery to the carrier or the consigner, even if freight fees are included in the sale price.
- All DURALITE products are strictly inspected before delivery and they are guaranteed against production defects in compliance with European safety standards for 2 years.
- The company will judge from time to time its responsibility and in case of responsibility it will proceed to the replacement.
- The faulty pieces will be given back to DURALITE company at customer's expenses.
- The warranty doesn't cover the costs of transport, uninstallation, reinstallation.
- DURALITE S.r.l. company will not be liable for any damages arising from incorrect installation, misuse or use with components of other products.
- For any controversy, the court of Brescia (Italy) will have exclusive jurisdiction .  
All DURALITE S.r.l. products are produced in compliance with European safety standards.

The DURALITE S.r.l. reserves the right to make improvements to the products described in this catalogue without giving prior notice.

## DURALITE sells all over the WORLD

---





**Duralite S.r.l.**  
via Brescia, 77  
25065 Lumezzane (BS) - Italy

Tel. +39 030 871421

[info@duralite.it](mailto:info@duralite.it)  
[www.duralite.it](http://www.duralite.it)





**Duralite S.r.l.**

Via Brescia, 77, 25035  
Lumezzane (BS) - Italy

Tel. +39 030 871421

[info@duralite.it](mailto:info@duralite.it)  
[www.duralite.it](http://www.duralite.it)